#### **Product Information**

| Class UPEC*                          |                |        | $U_4P_3E_2C_2$           |
|--------------------------------------|----------------|--------|--------------------------|
| Norm                                 |                |        | EN ISO 10582             |
| Usage Classification                 | ISO 10874      | EN 685 | 23 - 34 - 43             |
| Total Thickness                      | EN ISO 24346   | EN 428 | 2,00 mm                  |
| Wear Layer                           | EN ISO 24340   | EN 429 | 0,70 mm                  |
| Total Weight*                        | EN ISO 23997   | EN 430 | 2800 g/m²                |
| Abrasion group                       | EN 660-2       |        | T Class                  |
| Standard width                       | EN ISO 24341   | EN 426 | 2-4 m                    |
| Standard length                      | EN ISO 24341   | EN 426 | +/- 22 m                 |
| Dimensional stability                | EN ISO 23999   | EN 434 | ≤ 0,40 %                 |
| Light stability*                     | EN ISO 105 B02 |        | ≥ 6 degree               |
| Residual indentation*                | EN ISO 24343-1 | EN 433 | ≤ 0,10 mm                |
| Impact sound improvement*            | EN ISO 717/2   |        | ∆ Lw 6 dB                |
| Slip resistance (ramp test with oil) | DIN 51130      |        | R10                      |
| Reaction to fire                     | EN 13501-1     |        | Bfl-s1                   |
| Thermal resistance                   | ISO 8302       |        | 0,014 m <sup>2</sup> K/W |
| Walk Noise                           | NF S 31-074    |        |                          |
| Static Electrical Propensity         | EN 1815        |        | < 2kV (On concrete)      |

#### Features:

























### Certifications:






















## **Project Vinyl III**

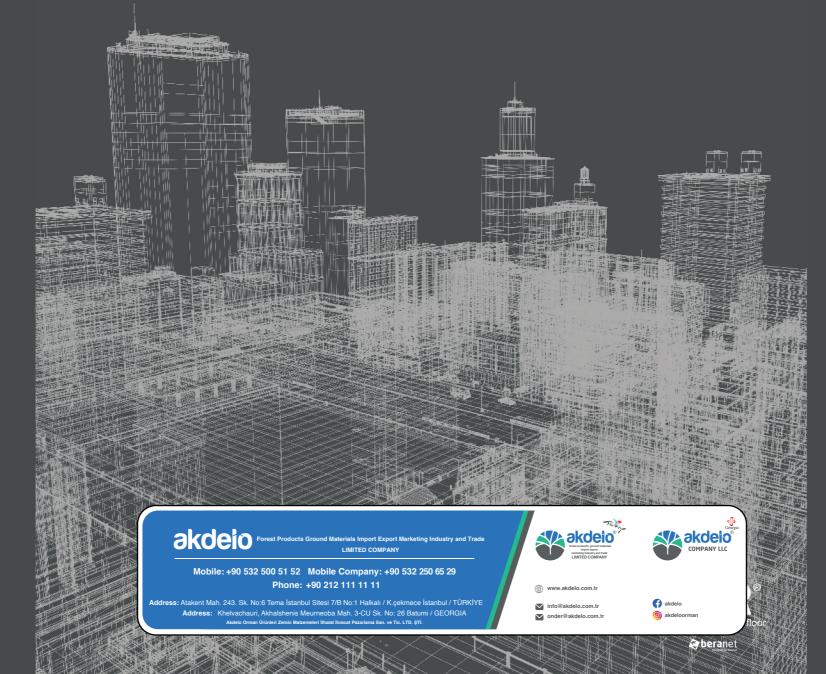

# **Project Vinyl III**






Golden Oak 016M Plank Size: 10 x 100 cm Repeat: 100 x 100 cm



Zinc 679M Pattern: Allover Repeat: 100 x 100 cm



Safira 639S Pattern: Allover Repeat: 0 x 0 cm

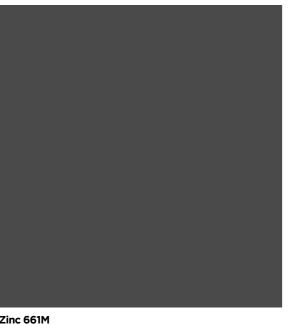

Zinc 661M Pattern: Allover Repeat: 100 x 100 cm



Safira 939L Pattern: Allover Repeat: 100 x 100 cm



Pattern: Allover Repeat: 100 x 100 cm



Terrazzo 223M Pattern: Allover Repeat: 0 x 0 cm



Terrazzo 555M Pattern: Allover Repeat: 0 x 0 cm



**Terrazzo 334D**Pattern: Allover Repeat: 0 x 0 cm
←



**Terrazzo 696M**Pattern: Allover Repeat: 0 x 0 cm ←



**Terrazzo 116L**Pattern: Allover Repeat: 0 x 0 cm ←



**Terrazzo 996D**Pattern: Allover Repeat: 0 x 0 cm ←



**Terrazzo 555M**Pattern: Allover Repeat: 0 x 0 cm



Terrazzo 334D
Pattern: Allover Repeat: 0 x 0 cm
←



**Terrazzo 696M**Pattern: Allover Repeat: 0 x 0 cm ←



### Antibacterial technology Bacteria Shield+

Our Bacteria Shield+ PU lacquer includes biocides which prevent the growth of bacteria on the surface of our floors. Our vinyl floors that have been treated with our Bacteria Shield+ lacquer have been tested according to ISO 22196 standards which measures antibacterial activity on surfaces. The antibacterial activity is the difference of the viable cell count found on a floor treated with Bacteria Shield+ lacquer and a floor without this treatment after inoculation with and incubation of bacteria over a period of 24 hours. Results show that 99.9% of all bacteria have vanished, so this demonstrates the floor not only prevents surface bacteria growth but even kills them.