



**akdeio**®

forest products ground materials  
import export  
marketing industry and trade  
**LIMITED COMPANY**

*Türkiye*



**Tarkett**

iQ Toro SC / iQ Granit SD

**AMELİYATHANE UYGULAMASI İÇİN**

**HOMOJEN VİNİL PVC (İLETKEN)**

**HASTANE AMELİYATHANESİ İÇİN**

**TARKETT ÜRETİM ÜLKESİ İSVEÇ**

**FOR OPERATING ROOM APPLICATION**

**HOMOGENEOUS VINYL PVC (CONDUCTIVE)**

**HOSPITAL OPERATING ROOM**

**TARKETT MADE IN SWEDEN**

**akdeio**

Forest Products Ground Materials Import Export Marketing Industry and Trade  
LIMITED COMPANY

Mobile: +90 532 500 51 52 Mobile Company: +90 532 250 65 29

Phone: +90 212 111 11 11

Address: Atakent Mah. 243. Sk. No:6 Tema İstanbul Sitesi 7/B No:1 Halkalı / K.çekmece İstanbul / TÜRKİYE

Address: Khelvachauri, Akhalshenis Meurneoba Mah. 3-CU Sk. No: 26 Batumi / GEORGIA

Akdeio Orman Ürünleri Zemin Malzemeleri İthalat İhracat Pazarlama San. ve Tic. LTD. ŞTİ.



Forest Products Ground Materials  
Import Export  
Marketing Industry and Trade  
LIMITED COMPANY



Forest Products Ground Materials  
Import Export  
Marketing Industry and Trade  
COMPANY LLC

www.akdeio.com.tr

info@akdeio.com.tr

onder@akdeio.com.tr

akdeio

akdeioorman

**beranet**  
Designed by beranet

# iQ Toro SC / iQ Granit SD


## High static performances

The iQ Toro SC and iQ Granit SD are designed for **very sensitive environments** such as industrial and healthcare areas. They benefit from the **unique patented iQ next-generation surface treatment** for high durability and resistance.

## Mix and match

These 28 references (14 colours each) are designed to match and coordinate not only with one another, but to harmonize with selected references from the Tarkett iQ ranges: **iQ Granit** and **Granit Safe.T**. Every colour has a coordinated welding rod for a perfect finish.


## iQ Toro SC

 Permanently **static conductive** flooring  
Resistance between R<sub>1</sub> 5x10<sup>4</sup> and 10<sup>6</sup> Ω



iQ Toro SC light grey 3093 100

## iQ Granit SD

 Permanently **static dissipative** flooring  
Electrical resistance of R<sub>1</sub> ≤ 10<sup>8</sup> Ω



iQ Granit SD black 3096 953

## iQ new for life™

iQ Toro SC & iQ Granit SD are part of the iQ range and therefore benefit from all the iQ properties.

- For lifelong savings - save 30% on maintenance and see payback within 3 years thanks to iQ's superior performance.
- For lifelong performance - keep your floor looking new with our unique dry-buffing restoration technology.
- A sustainable future - contribute positively to the environment and people's well-being thanks to our Cradle to Cradle® approach.

# iQ Toro SC Static Conductive iQ Granit SD Static Dissipative

TECHNICAL DATA	STANDARDS	iQ TORO SC	iQ GRANIT SD
<b>CERTIFICATION &amp; CLASSIFICATION</b>			
Type of floor covering	EN ISO 10581	Permanently static conductive pressed homogeneous vinyl flooring	Permanently static dissipative pressed homogeneous vinyl flooring
Declaration of Performance	EN 14041	0019-0038-DoP-2013-07	0019-0033-DoP-2013-07
Binder content	EN ISO 10581	Type I	Type I
Classification	EN ISO 10874	Commercial: 34 / Industrial: 43	Commercial: 34 / Industrial: 43
Recyclable	ISO 14021	Yes, post installation and post use	Yes, post installation and post use
<b>TECHNICAL CHARACTERISTICS</b>			
Surface treatment		iQ	iQ
Surface restoration		Yes	Yes
Total thickness	EN ISO 24346	2.0 mm	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm	2.0 mm
Total weight	EN ISO 23997	2800 g/m <sup>2</sup>	2800 g/m <sup>2</sup>
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 running metres x 200 cm Art. no. 3093 ___ 3 digit colour number	Approx. 23 running metres x 200 cm Art. no. 3096 ___ 3 digit colour number
	EN ISO 24342 Tiles (box)	61 x 61 cm - 14 tiles/box = 5.21 m <sup>2</sup> Art. no. 3094 ___ 3 digit colour number	61 x 61 cm - 14 tiles/box = 5.21 m <sup>2</sup> Art. no. 3097 ___ 3 digit colour number
<b>TECHNICAL PERFORMANCES</b>			
Reaction to fire	EN ISO 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl-s1 ≥ 8 kW/m <sup>2</sup> Pass	Class Bfl-s1 ≥ 8 kW/m <sup>2</sup> Pass
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Average measured value*: 0.02 mm	Required value: ≤ 0.10 mm Average measured value*: 0.02 mm
Castor chair test	ISO 4918	Suitable	Suitable
Static electrical discharge	EN 1815 On any surface ≤ 10 <sup>9</sup> Ω	< 2.0 kV	< 2.0 kV
Electrical insulation	VDE 0100, Part 600	R <sub>i</sub> ≥ 5 x 10 <sup>4</sup> Ω	R <sub>i</sub> ≥ 5 x 10 <sup>4</sup> Ω
Electrical resistance	ESD-approval SP-method 2472 EN 1081	R ≤ 1x10 <sup>9</sup> Ω R <sub>1</sub> 5x10 <sup>4</sup> ≤ R ≤ 10 <sup>6</sup> Ω R <sub>2</sub> 5x10 <sup>4</sup> ≤ R ≤ 10 <sup>6</sup> Ω R 5x10 <sup>4</sup> ≤ R ≤ 10 <sup>6</sup> Ω ≤ 3.5x10 <sup>7</sup> Ω	R ≤ 1x10 <sup>9</sup> Ω R <sub>1</sub> ≤ 10 <sup>8</sup> Ω R <sub>2</sub> ≤ 10 <sup>8</sup> Ω R ≤ 10 <sup>8</sup> Ω
Clean room	ISO 14644-1	ISO class 4	ISO class 4
Total VOC emissions	ISO 16000-6 Indoor air quality FloorScore	≤ 10 µg/m <sup>3</sup> (after 28 days) Platinum SCS certified	≤ 10 µg/m <sup>3</sup> (after 28 days) Platinum SCS certified
Underfloor heating		Suitable - max. 27°C	Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ level 7	≥ level 7
Ease of decontamination	ISO 8690 - DIN 25415	Excellent	Excellent
Chemical resistance	EN ISO 26987	Excellent	Excellent
Bacteria resistance	ISO 846 Part C	Does not favour growth	Does not favour growth
Slip resistance	DIN 51130 EN 13893 BS 7976-2	R9 µ ≥ 0.3 Low risk of slip	R9 µ ≥ 0.3 Low risk of slip
<b>COLOURS</b>		14	14

The above information is subject to modification for the benefit of further improvement. (02/22).  
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website [www.tarkett.com](http://www.tarkett.com).  
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



iQ Toro SC	NCS N°	Welding Rod No.	iQ Toro SC	NCS N°	Welding Rod No.	iQ Granit SD	NCS N°	Welding Rod No.	iQ Granit SD	NCS N°	Welding Rod No.
100	S 1500-N	1287 322	956	S 3010-Y30R	1287 889	395	S 1500-N	1287 446	948	S 2500-N	1287 630
101	S 2500-N	1291 811	957	S 1510-Y30R	1287 355	436	S 4005-Y20R	1287 830	949	S 4502-B	1287 831
102	S 4502-B	1292 383	958	S 3005-Y50R	1287 945	467	S 3010-Y30R	1289 803	950	S 6502-B	1287 842
103	S 8502-B	1292 384	959	S 2005-G	1287 946	468	S 1510-Y30R	1291 615	953	S 8502-B	1287 375
104	S 1505-Y50R	1288 255	960	S 2020-R90B	1287 947	474	S 3005-Y50R	1287 696	954	S 1505-Y50R	1287 698
578	S 6502-B	1291 216	961	S 2020-B10G	1287 948	475	S 2005-G	1287 323	980	S 2020-B10G	1287 297
955	S 4005-Y20R	1287 284	966	S 2010-G	1287 949	476	S 2020-R90B	1287 803	994	S 2010-G	1287 860

■ WESTERN EUROPE: Austria: Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 • Belgium: Tarkett Belux Sprl - Tel. +32 52 26 24 11 • Denmark: Tarkett A/S - Tel. +45 43 90 60 11 • Finland: Tarkett Oy - Tel. +358 9 4257 9000 • France: Tarkett SAS - Tel. +33 1 41 20 42 49 • Germany: Tarkett Holding GmbH - Tel. +49 62 33 810 • Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 • Italy: Tarkett S.p.A. - Tel. +39 0744 7551 • Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 • Netherlands: Tarkett BV - Tel. +31 416 685 491 • Norway: Tarkett AS - Tel. +47 32 20 92 00 • Portugal: Tarkett SA - Tel. +351 21 427 64 20 • Spain: Tarkett Floors SL - Tel. +34 914 951 400 • Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH - Tel. +41 043 233 79 24 • Turkey: Tarkett Aspen - Tel. +90 212 223 65 39 • United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 354 040 ■ EASTERN EUROPE: Baltic Countries: Estonia: +372 55 51 8880 - Latvia: +371 26 112014 - Lithuania: +370 37 262220 • Czech Republic: Tarkett org sloka - Tel. +420 271 001 600 • Hungary: Tarkett Polska SP Z O.O. magyarorszagj fioktelepe - Tel. +36 1 437 8150 • Poland: Tarkett Polska Sp. z o. o. - Tel. +48 22 16 09 231 • Russian Federation: ZAO Tarkett RUS - Tel. +495 775 3737 • Slovakia: Tarkett Polska, organizacni zlozka - Tel. +421 2 48291 317 • South East Europe: Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 • Ukraine: Tarkett UA - Tel. +38 (0) 44 35 45 621 ■ ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 • China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 • North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 • India: Tarkett Flooring India Pvt. Ltd. - Bangalore - Tel. +91 80 4130 3793 - New Delhi - Tel. +91 11 4352 4073 - Mumbai - Tel. +91 22 2648 8750 • South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1535 ■ AFRICA: Tarkett International: Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 336314 • Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ NORTH AMERICA: USA: Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonite - Tel. +1 440 543 8916 • Canada: Tarkett Inc. - Tel. +1 450 293 1773 ■ LATIN AMERICA: Brazil: Tarkett - Tel. 55 12 3954 7108 • Argentina - Chile - Uruguay: Tarkett Latam Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 • Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett - Tel. +55 11 98410 9310 / +55 11 95494 0069 • Mexico / Central America: Tarkett Latam Mexico - Tel. +55 11 98410 9310

[www.professionals.tarkett.com](http://www.professionals.tarkett.com)



# iQ Toro SC iQ Granit SD

HOMOGENEOUS COMPACT VINYL

Homogeneous  
conductive  
and dissipative  
solutions



iQ Toro SC  
iQ Granit SD



HOMOGENEOUS  
COMPACT VINYL








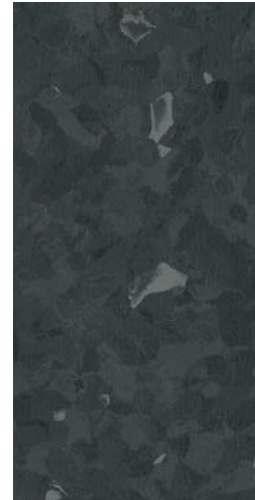
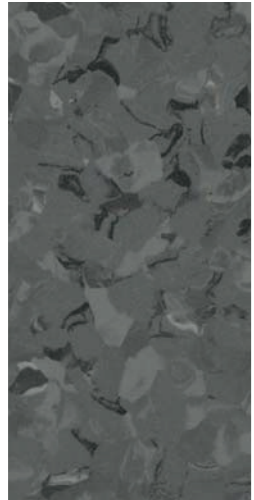
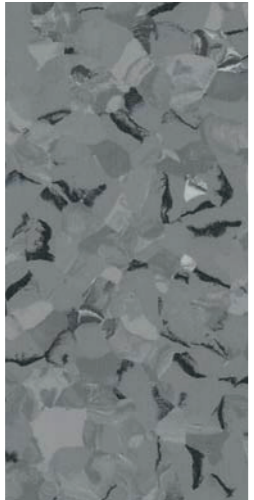
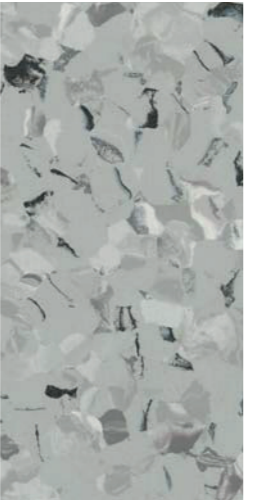
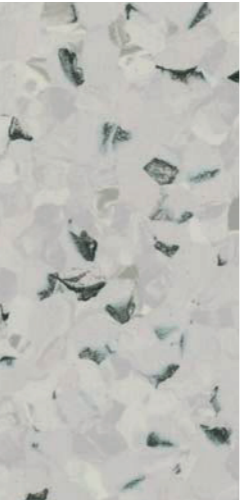
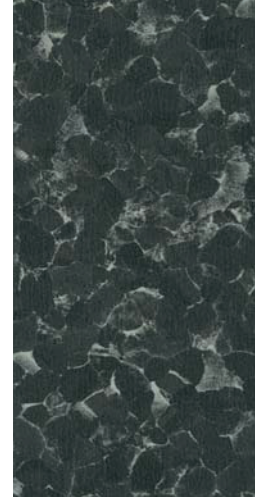
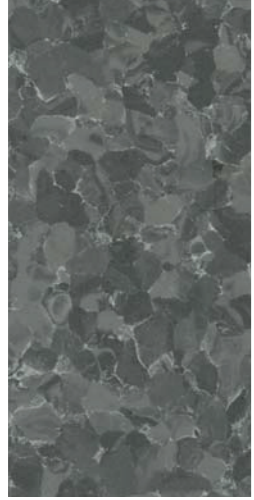


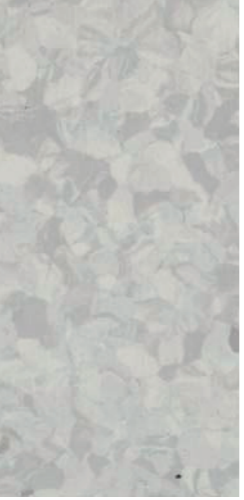





Printed on recyclable paper and cardboard

Customs tariff: 482050000

iQ Toro SC / iQ Granit SD - 310001 0041 - 02/22

# iQ Toro SC / iQ Granit SD

iQ Toro SC and iQ Granit SD are colour matched to coordinate with iQ Granit, iQ Granit Acoustic and Granit Safe.T ranges.





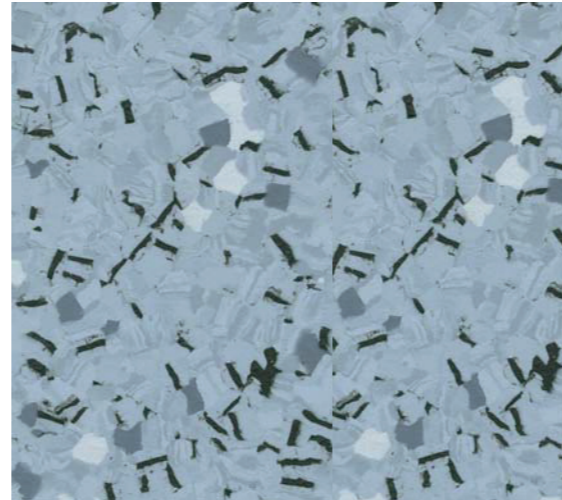

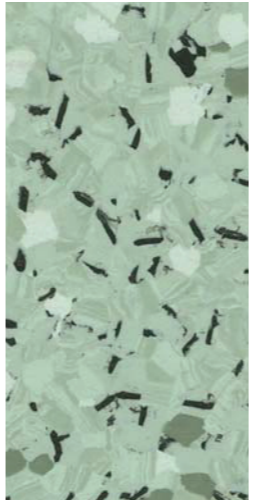
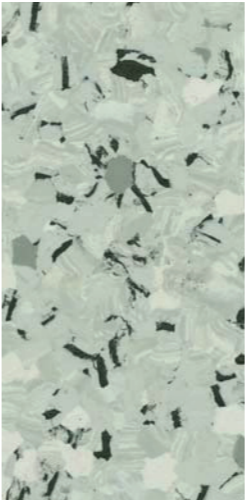








	NCS S 8502-B / LRV 6%	NCS S 6502-B / LRV 15%	NCS S 4502-B / LRV 29%	NCS S 2500-N / LRV 50%	NCS S 1500-N / LRV 65%
<b>iQ Granit Acoustic</b>	 © 21142 211 □ 21143 211 © 21155 211 <b>A</b>	 © 21142 194 □ 21143 194 © 21155 194 <b>A</b>	 © 21142 188 □ 21143 188 © 21155 188 <b>A</b>	 © 21142 161 □ 21143 161 © 21155 161 <b>A</b>	 © 21142 160 □ 21143 160 © 21155 160 <b>A</b>
<b>iQ Toro SC</b>	 © 3093 103 □ 3094 103	 © 3093 578 □ 3094 578	 © 3093 102 □ 3094 102	 © 3093 101 □ 3094 101	 © 3093 100 □ 3094 100
<b>iQ Granit SD</b>	 © 3096 953 □ 3097 953	 © 3096 950 □ 3097 950	 © 3096 949 □ 3097 949	 © 3096 948 □ 3097 948	 © 3096 395 □ 3097 395
<b>Granit Safe.T</b>	 © 21153 506	 © 21153 505	 © 21153 504	 © 21153 503	 © 21153 502

The flooring colours and designs on our iQ Toro SC and iQ Granit SD sample cards are for illustration purpose only. They are not contractual images - which may differ from the actual floors - and do not stand for product recommendation. As a consequence, users agree that they alone are responsible for the use they make of this information. Please visit Tarkett's website (www.professionals.tarkett.com) or contact your Tarkett sales representative for all information on our product use and installation.








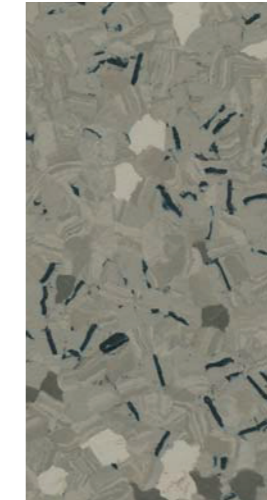


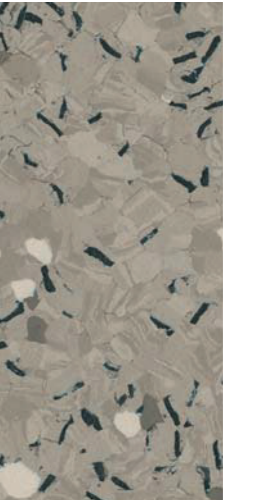

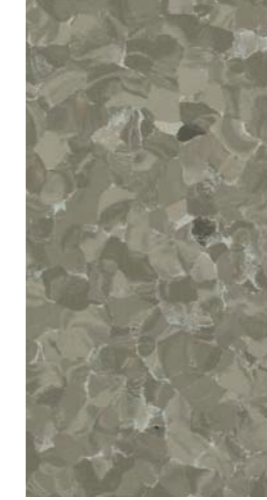









# iQ Toro SC / iQ Granit SD

iQ Toro SC and iQ Granit SD are colour matched to coordinate with iQ Granit, iQ Granit Acoustic and Granit Safe.T ranges.

	NCS S 2020-R90B / LRV 44%	NCS S 2020-B10G / LRV 44%	NCS S 2010-G / LRV 52%	NCS S 2005-G / LRV 54%
<b>iQ Granit Acoustic</b>	 © 21142 341 □ 21143 341 © 21155 341 <b>A</b>	 © 21142 369 □ 21143 369 © 21155 369 <b>A</b>	 © 21142 390 □ 21143 390 © 21155 390 <b>A</b>	 © 21142 338 □ 21143 338 © 21155 338 <b>A</b>
<b>iQ Toro SC</b>	 © 3093 960 □ 3094 960	 © 3093 961 □ 3094 961	 © 3093 966 □ 3094 966	 © 3093 959 □ 3094 959
<b>iQ Granit SD</b>	 © 3096 476 □ 3097 476	 © 3096 980 □ 3097 980	 © 3096 994 □ 3097 994	 © 3096 475 □ 3097 475
<b>Granit Safe.T</b>	 © 21153 516	 © 21153 517	 © 21153 518	 © 21153 514

# iQ Toro SC / iQ Granit SD

iQ Toro SC and iQ Granit SD are colour matched to coordinate with iQ Granit, iQ Granit Acoustic and Granit Safe.T ranges.

	NCS S 4005-Y20R / LRV 33%	NCS S 3010-Y30R / LRV 41%	NCS S 1510-Y30R / LRV 61%	NCS S 3005-Y50R / LRV 40%	NCS S 1505-Y50R / LRV 63%
<b>iQ Granit Acoustic</b>	 © 21142 321 □ 21143 321 © 21155 321 <b>A</b>	 © 21142 322 □ 21143 322 © 21155 322 <b>A</b>	 © 21142 298 □ 21143 298 © 21155 298 <b>A</b>	 © 21142 329 □ 21143 329 © 21155 329 <b>A</b>	 © 21142 325 □ 21143 325 © 21155 325 <b>A</b>
<b>iQ Toro SC</b>	 © 3093 955 □ 3094 955	 © 3093 956 □ 3094 956	 © 3093 957 □ 3094 957	 © 3093 958 □ 3094 958	 © 3093 104 □ 3094 104
<b>iQ Granit SD</b>	 © 3096 436 □ 3097 436	 © 3096 467 □ 3097 467	 © 3096 468 □ 3097 468	 © 3096 474 □ 3097 474	 © 3096 954 □ 3097 954
<b>Granit Safe.T</b>	 © 21153 508	 © 21153 509	 © 21153 511	 © 21153 513	 © 21153 512