



akdeio[®]

forest products ground materials
import export
marketing industry and trade
LIMITED COMPANY



**Krono
Original**[®]

High Quality

Made by Kronospan



O.R.C.A.[®]

MOISTURE DEFENSE TECHNOLOGY

Flooring
assortment 2025

www.krono-original.com

akdeio

Forest Products Ground Materials Import Export Marketing Industry and Trade
LIMITED COMPANY

Mobile Company: +90 532 250 65 29

Phone: +90 212 111 11 11

Address: Alakent Mah. 243. Sk. No:6 Tema İstanbul Sitesi 7/B No:1 Halkalı / K.çekirgece İstanbul / TÜRKİYE



akdeio[®]
forest products ground materials
import export
marketing industry and trade
LIMITED COMPANY

www.akdeio.com.tr
info@akdeio.com.tr

[akdeio](https://www.facebook.com/akdeio)
[akdeioorman](https://www.instagram.com/akdeioorman)

100% ORIGINAL
HIGH PERFORMANCE FLOOR
MADE BY KRONOSPAN

beranet
Yazılım Tasarım Hizmetleri Ltd. Şti.

Welcome to our world!

FEATURES GUIDE	04
PRODUCT OVERVIEW	06
O.R.C.A. TECHNOLOGY	08

Organic FLEX	14
Organic TOUCH	24
Organic COMFORT SILENT	30
Organic CLASSIC	36
Organic CLEVER LONG SILENT	50
Organic CLEVER SILENT	56
Organic CLEVER	56

FORMAT OVERVIEW	64
PerfectPad [®]	65
ACCESSORIES	66
SKIRTING BOARDS	69
DECOR OVERVIEW	70
PACKAGING INFORMATION	71



www.krono-original.com

www.facebook.com/KronoOriginal



Features guide

Your benefits at a glance



Residential guarantee

All floors are put through a series of rigorous tests in order to comply with international quality standards, which is why we grant an extensive residential warranty with every product.



Robust

This flooring is amazingly robust due to its super durable surface. Moving furniture or falling objects are not a problem because of its high pressure and impact resistance.



Real groove

Bevelled edges on all four sides of the plank ensure an authentic floorboard look.



Warm underfoot

Due to its flexible design layer, the flooring has comfortable haptics and is warm underfoot.



Antibacterial comfort

A.B.C. Anti Bacterial Comfort inhibits the growth of bacteria on your flooring and provides you with the peace of mind that comes from a healthy home environment. Tested germs: Staphylococcus aureus



Anti-slip class

Safety is something we put great emphasis on. Classification in anti-slip classes has been achieved through specially developed surface structures, which address the requirements for floor coverings in the workplace and commercial areas where a high risk of slipping is present.



Authentic embossed

The synchronous pores follow the grain of the decor, meaning they flawlessly mimic the character of natural wood.




Anti-slip class

Classification:
R9 and R10 according to DIN 51130 and DIN EN 16165, A and B according to DIN EN 16165



Microscratch protect

The robust surface protects your flooring against micro-scratches that can be caused by strong mechanical stresses or the claws of house pets.



Design diversity

Up to 60 different panels on digitally printed design are possible. This lends your flooring an authentic appearance that is virtually free of repetition.



Pet-proof

Thanks to the robust surface, which is also undaunted by small mishaps, the flooring is exceptionally well-suited for life with house-pets.



Soft Touch

The flooring has a soft surface and feels very comfortable.



Light-resistant

The flooring is light-resistant: Even on days when the sun is shining for hours, your flooring remains non-fading according to rating 6 of the Blue Wool Scale.



Anti-static

The flooring provides complete protection against unpleasant shocks. The Anti-static is built-in and guaranteed for the life of the floor.































Silent

Due to an integrated pad, the flooring reduces impact sound, echoes and vibrations. An additional underlay is not required, which saves time and money.



5543 Colorado Oak

Product overview















	Collection Name	Durability (Wear Resistance)	Coreboard (Water Protection)	Thickness
O.R.C.A. Flooring	Organic^{*1} FLEX 638 x 322 mm 25.12" x 12.68" 1288 x 189 mm 50.71" x 7.44"	 Titanium Ultra	 ⁺²   MOISTURE DEFENSE TECHNOLOGY	7 mm PerfectPad[®] Cork
	Organic^{*1} TOUCH 1383 x 159 mm 54.45" x 6.26" 1383 x 244 mm 54.45" x 9.61"	 AC5	 ⁺²   MOISTURE DEFENSE TECHNOLOGY	8.5 mm PerfectPad[®] Cork
	Organic^{*1} COMFORT SILENT 1288 x 195 mm 50.71" x 7.68"	 AC5	 ⁺²   MOISTURE DEFENSE TECHNOLOGY	7+1 mm PerfectPad[®] Cork
	Organic^{*1} CLASSIC 638 x 330 mm 25.12" x 12.99" 1288 x 195 mm 50.71" x 7.68"	 AC5	 ⁺²   MOISTURE DEFENSE TECHNOLOGY	8 mm
	Organic^{*1} CLEVER LONG SILENT 2003 x 245 mm 78.86" x 9.65"	 AC5	 ⁺²   MOISTURE DEFENSE TECHNOLOGY	6+1 mm PerfectPad[®] Eco
	Organic^{*1} CLEVER SILENT 1288 x 195 mm 50.71" x 7.68"	 AC5	 ⁺²   MOISTURE DEFENSE TECHNOLOGY	6+1 mm PerfectPad[®] Eco
	Organic^{*1} CLEVER 1288 x 195 mm 50.71" x 7.68"	 AC5	 ⁺²   MOISTURE DEFENSE TECHNOLOGY	6 mm

*1 Consists of natural wood and an organic chemical binder

*2 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com, up to 100 h no leakage based on ISO 4760:2022-05

*3 According to warranty terms

*4 Selected decors

Pet-proof	Utilization Class	Residential Guarantee ³	Bevel	Joint	Authentic Embossed	SKUs
	34 	30 years	V4	1clic 2go pure+	-	11
	33 	30 years	Soft Bevel	Tap Loc	-	4
	32 	20 years	V4	1clic 2go pure+	-	6
	33 	30 years	V4	1clic 2go pure+	Yes ¹⁴	15
	32 	20 years	V4	1clic 2go pure+	Yes	6
	32 	20 years	V4	1clic 2go pure+	Yes	8
	32 	20 years	V4	1clic 2go pure+	Yes	8


Σ 58

The floor
that takes it all

K503 Pebble Manor Oak

How O.R.C.A. technology works

Each fiber is encapsulated with a special binder that prevents it from absorbing water.

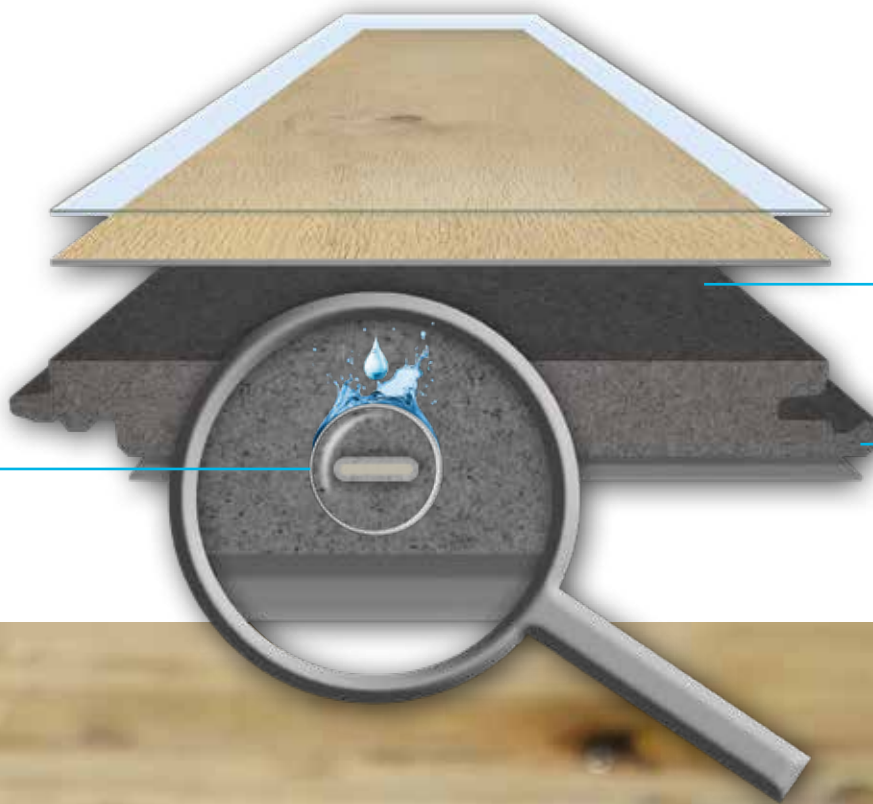

Short fiber length and geometry reduces potential swelling.

Micro expansion on the edges seals the connection between planks.






Wood's self sealing property

Wood expands when exposed to moisture and in doing so seals itself, preventing liquid penetration.

Boat builders take advantage of wood's natural self sealing property.

Wine barrels are still sealed using this time tested method.

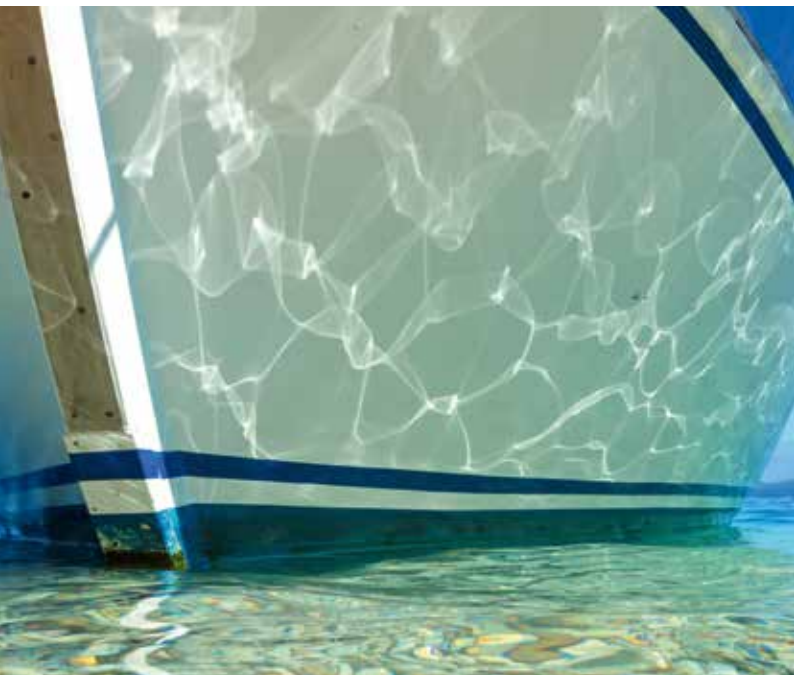



MOISTURE DEFENSE TECHNOLOGY

The floor that combines the best

O.R.C.A. = Organic*¹ Rigid Coreboard Abrasion-proof

O.R.C.A. is twice as good

It unites the best qualities of biologically based floors and conventional waterproof floor coverings. In O.R.C.A., organic*¹ materials are made resistant to liquids by means of a special technology.

O.R.C.A. makes the flooring usable anywhere

The innovative O.R.C.A. board makes it possible to install the flooring even in private bathrooms*² where, until now, only vinyl or tiles could be used. Furthermore, thanks to their outstanding thermal stability and non-fading properties, O.R.C.A. products also can be used in conservatories and rooms with floor-to-ceiling windows.

O.R.C.A. floors are extremely robust

The robust surface with an AC5 durability rating, protects the flooring against microscratches that can be caused by strong mechanical stresses such as moving furniture, falling objects or the claws of house pets. Thanks to its durable properties, which are also undaunted by small mishaps, O.R.C.A. floors are exceptionally well-suited for life with house pets.

O.R.C.A. is built better because it is more elaborately manufactured

The wood fibers are mechanically processed multiple times in a special production process to obtain especially small fibers. Further on in the manufacturing process a specially developed, organic-chemical binding agent surrounds even the finest fibers and isolates them from moisture.

The floor that's not afraid of water

100 h+ splash-water protection guaranteed*³

Little accidents occur almost daily. Wherever such things are bound to happen, it's worth relying on O.R.C.A. Kitchen, dining room, bathroom – O.R.C.A. is a perfect fit.



Scan the QR code and convince yourself!



*¹ Consists of natural wood and an organic chemical binder

*² Please observe installation instructions

*³ 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com, up to 100 h no leakage based on ISO 4760:2022-05



**So reliable
you can afford
to take the plunge**



O.R.C.A.[®]

MOISTURE DEFENSE TECHNOLOGY

The flooring that is naturally nature-friendly



www.blauer-engel.de/uz176



Sustainable

Sustainability isn't just a buzzword for us, but part of our corporate strategy. It would never cross our minds to use wood that didn't come from sustainably managed forests.

CO₂-negative

O.R.C.A. boards are CO₂-negative because manufacturing O.R.C.A. releases less CO₂ than was stored by the tree.

Organic

Our O.R.C.A. board consists of components based on biological raw materials and organic-chemical binding agents (synthetic resins) and thus is organic.

PVC-free

Our O.R.C.A. products contain no PVC*.



* May contain traces of PVC, e.g. from packaging





K500 Pearl River Oak



rganic FLEX

with **PerfectPad**® Cork 1 mm

O.R.C.A.®
MOISTURE DEFENSE TECHNOLOGY



Thickness:
7 mm

Formats:
638 x 322 mm | 25.12" x 12.68"
1288 x 189 mm | 50.71" x 7.44"

Lock:
1 clic 2go pure+



EN 16511



Pebble Manor Oak
K503



rganic FLEX



with PerfectPad® Cork 1 mm




1288 mm
(50.71")
189 mm
(7.44")

Lunar Range Oak
K506




K500
Pearl River Oak, TN

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY

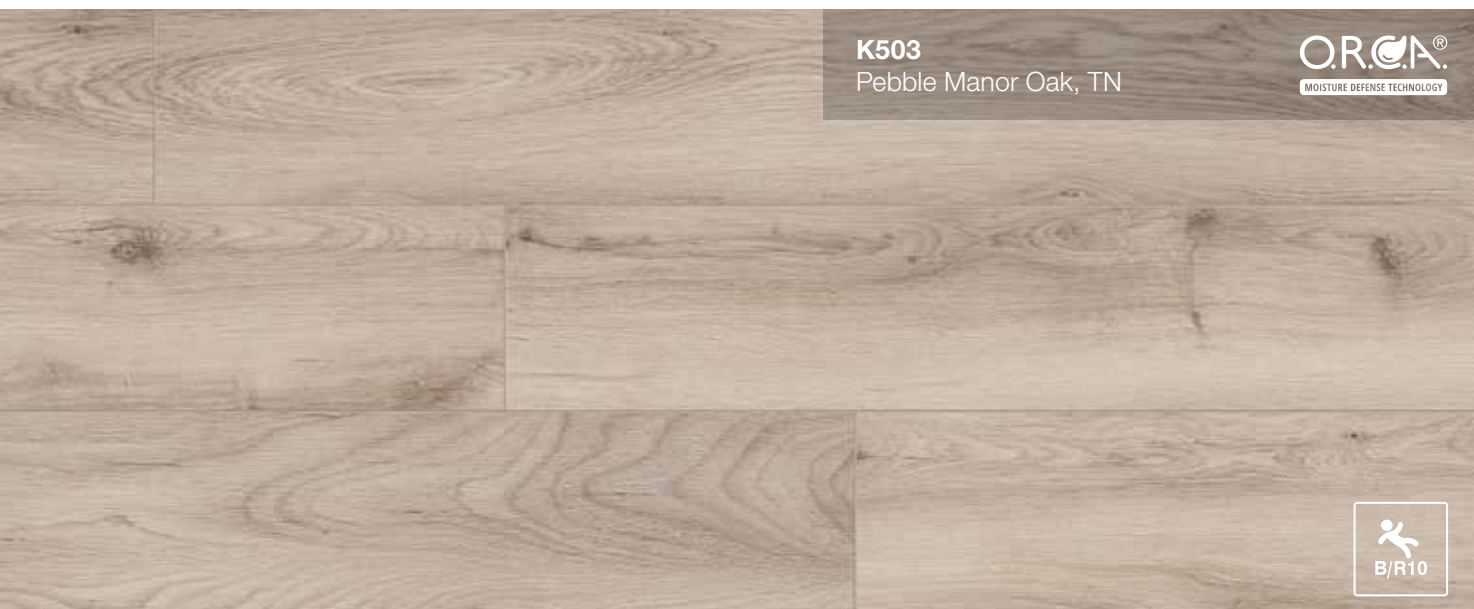

K503
Pebble Manor Oak, TN

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY

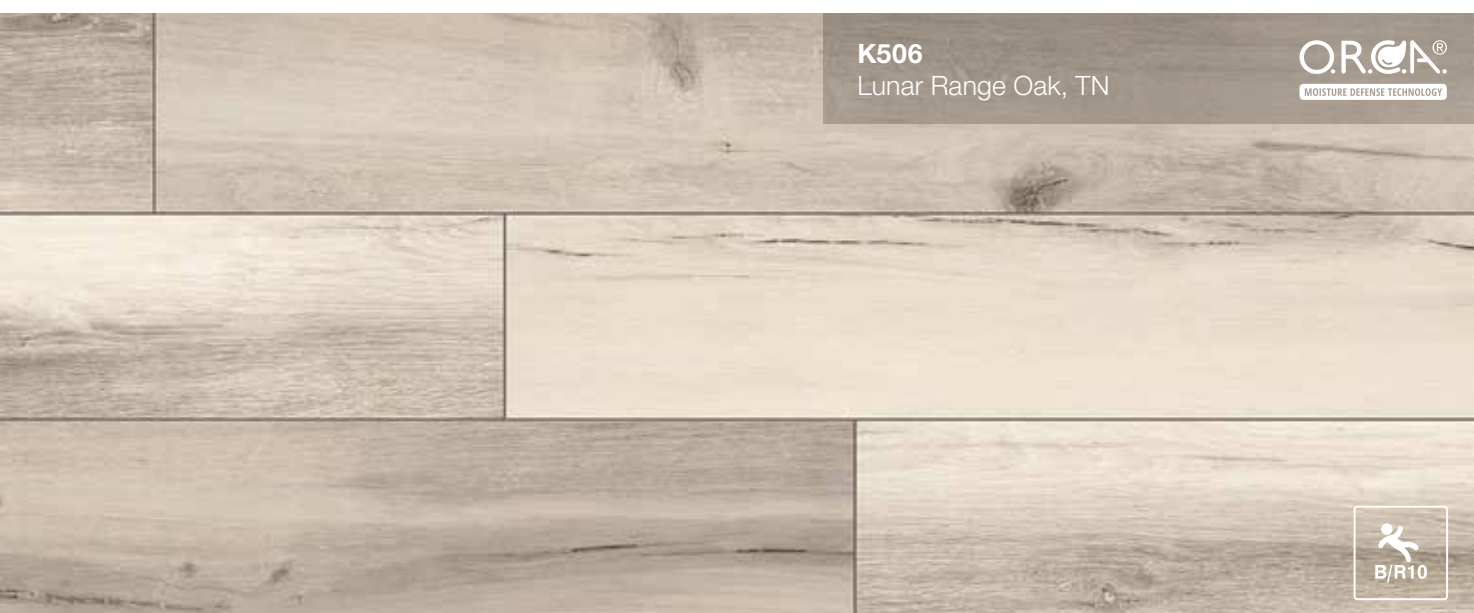

K506
Lunar Range Oak, TN

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic FLEX



with PerfectPad® Cork 1 mm



Sand River Oak
K501

K501
Sand River Oak, TN

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K507
Hazel Range Oak, TN

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K504
Tuscan Manor Oak, TN

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic FLEX



with PerfectPad® Cork 1 mm



K505



Flax River Oak
K502


K502
Flax River Oak, TN

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY



K505
Tobacco Manor Oak, TN


O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY

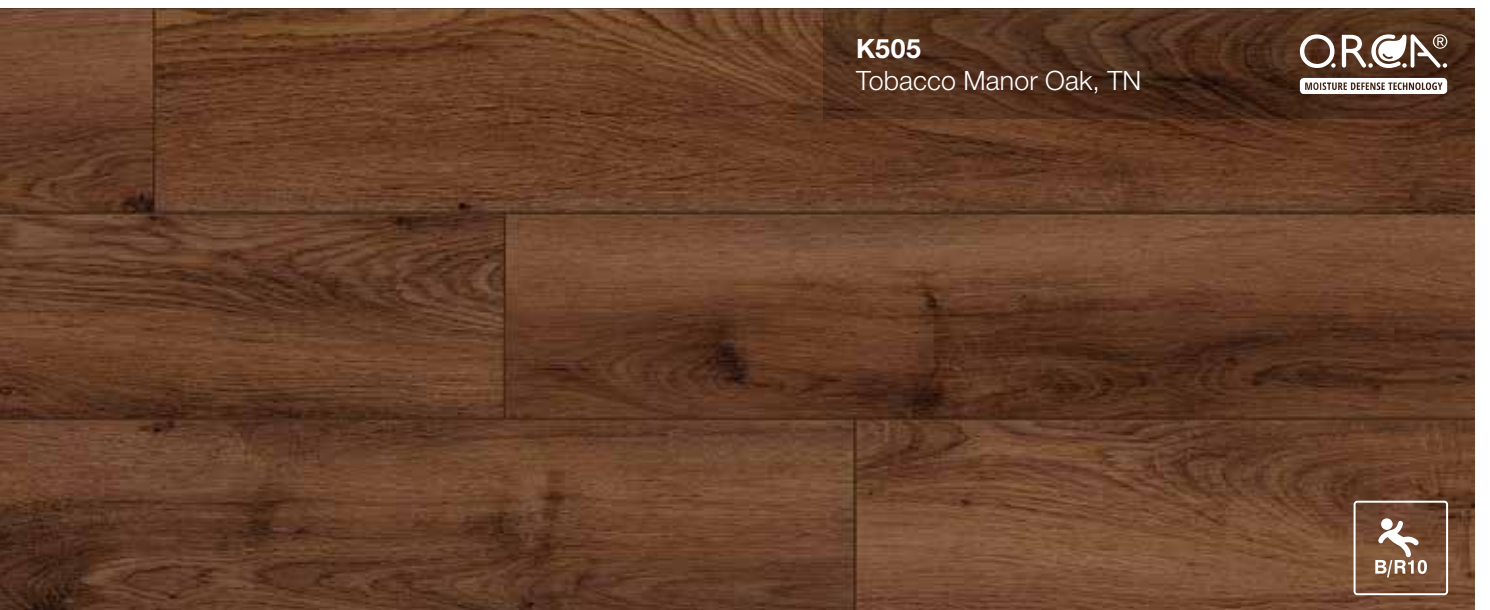

rganic FLEX



with PerfectPad® Cork 1 mm

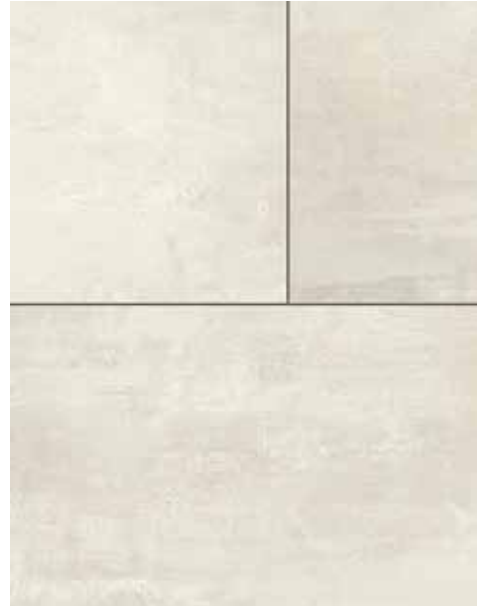

Brooklyn Vibe
K509



K508
Brooklyn Mist, US

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K509
Brooklyn Vibe, US

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K510
Brooklyn Dark, US

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



rganic TOUCH

with **PerfectPad**® Cork 1 mm

O.R.C.A.®
MOISTURE DEFENSE TECHNOLOGY



Thickness:
8.5 mm

Formats:
1383 x 159 mm | 54.45" x 6.26"
1383 x 244 mm | 54.45" x 9.61"

Lock:
Tap Loc



EN 13229



Natural Red Oak
O980



Organic TOUCH



with PerfectPad® Cork 1 mm



NEW



NEW



1383 mm
(54.45")
159 mm
(6.26")

Pacific Cherry
0771

O980
Natural Red Oak, HG

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY



O771
Pacific Cherry, HG

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY

rganic TOUCH



with **PerfectPad®** Cork 1 mm

NEW

NEW

↑ 1383 mm
(54.45")
244 mm
(9.61")

Oak Alhambra
0943



O942
Oak Versailles, LU

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



O943
Oak Alhambra, LU

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic COMFORT SILENT

with **PerfectPad®** Cork 1 mm

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Thickness:
7+1 mm

Format:
1288 x 195 mm | 50.71" x 7.68"

Lock:
1clic 2go pure+



EN 13329




Buckingham Oak
K329



Organic COMFORT SILENT



with PerfectPad® Cork 1 mm



Chantilly Oak
5953




5953
Chantilly Oak, RO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K445
Ethereal Oak, TO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY

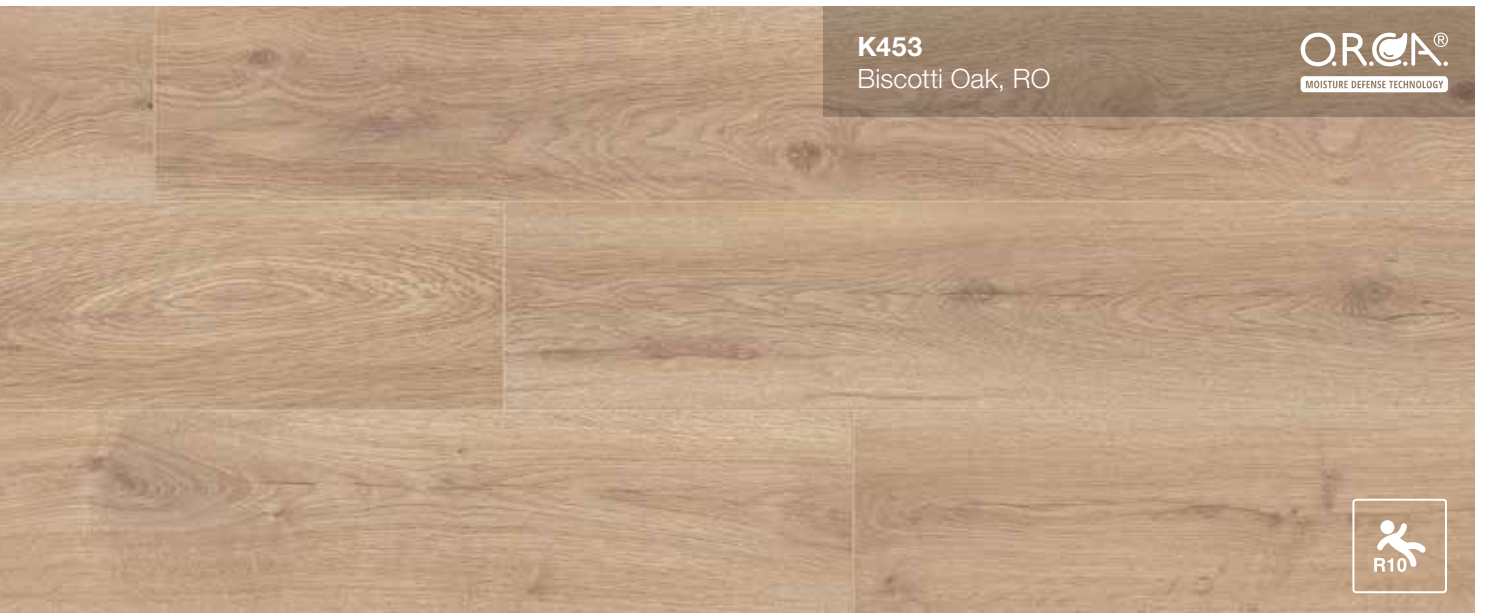

K453
Biscotti Oak, RO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic COMFORT SILENT 

with PerfectPad® Cork 1 mm



Wild West Oak
K224

K224
Wild West Oak, TO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K329
Buckingham Oak, RO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K489
Bourbon Hills Oak, NL

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



rganic CLASSIC


O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Thickness:
8 mm

Formats:
638 x 330 mm | 25.12" x 12.99"
1288 x 195 mm | 50.71" x 7.68"

Lock:
1 clic 2go pure+



EN 13329



Tornado Oak
K395



Organic CLASSIC 



↑ 1288 mm
(50.71")

→ 195 mm
(7.68")

Misty Plains Oak
K231

K668
Mist Ethereal Oak, ET

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K231
Misty Plains Oak, TO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K669
Rope Ethereal Oak, ET

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLASSIC  waterproof



Solar Oak
K405

K406
Eurus Oak, NL

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY



K405
Solar Oak, NL

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLASSIC  waterproof



Golden Vista Oak
K230

K230
Golden Vista Oak, TO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



5947
Historic Oak, HO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K224
Wild West Oak, NL

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY





K665
Copper Ethereal Oak, ET

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K395
Tornado Oak, NL

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K479
Espresso Carpenter Oak, CM

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY




Organic CLASSIC  waterproof



638 mm
(25.12")
330 mm
(12.99")

Silverado Slate
K387

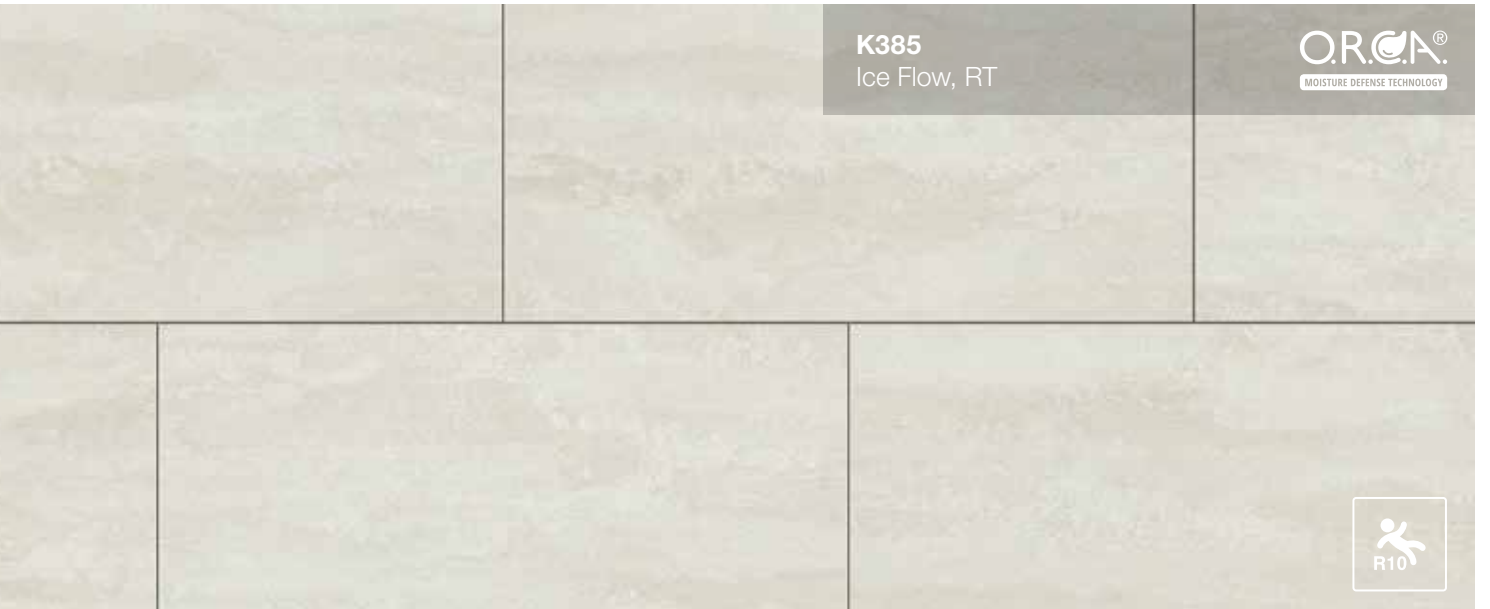

Organic CLASSIC  waterproof



Crosstown Traffic
K035

K035
Crosstown Traffic, AS

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY



K389
Nightfall Slate, OS

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY



rganic

CLEVER LONG SILENT

with **PerfectPad®** Eco 1 mm

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Thickness:
6+1 mm

Format:
2003 x 245 mm | 78.86" x 9.65"

Lock:
1cllic 2go pure+



EN 13329



Blonde Montreux Oak
K659



Organic CLEVER LONG SILENT 

with PerfectPad® Eco 1 mm



2003 mm
(78.86")

245 mm
(9.65")

Farrow Montreux Oak
K660

K663
Wool Tegersee Oak, TG

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K659
Blonde Montreux Oak, MX

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K660
Farrow Montreux Oak, MX

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLEVER LONG SILENT  waterproof

with PerfectPad® Cork 1 mm



Hare Tegernsee Oak
K664

K661
Natura Montreux Oak, MX

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K662
Sepia Tegernsee Oak, TG

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K664
Hare Tegernsee Oak, TG

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLEVER (SILENT)

Clever Silent with **PerfectPad®** Eco 1 mm

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Thickness:
CLEVER SILENT 6+1 mm
CLEVER 6 mm

Format:
1288 x 195 mm | 50.71" x 7.68"

Lock:
1 clic 2go pure+



EN 13329



All decors are available
with and without
PerfectPad® Eco



Rutherford Oak
K488



Organic CLEVER (SILENT) 

Clever Silent with PerfectPad® Eco 1 mm



1286 mm
(50.71")
195 mm
(7.68")

Colorado Oak
5543

5543
Colorado Oak, HC

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K063
Organic Oak, TO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



K452
Ashland Oak, HO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Organic CLEVER (SILENT) 

Clever Silent with PerfectPad® Eco 1 mm



Blackwater Oak
K413



K413
Blackwater Oak, OE

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY



K488
Rutherford Oak, CM

O.R.C.N.[®]
MOISTURE DEFENSE TECHNOLOGY




Organic CLEVER (SILENT)  waterproof

Clever Silent with PerfectPad® Eco 1 mm




Heathland Oak
K598

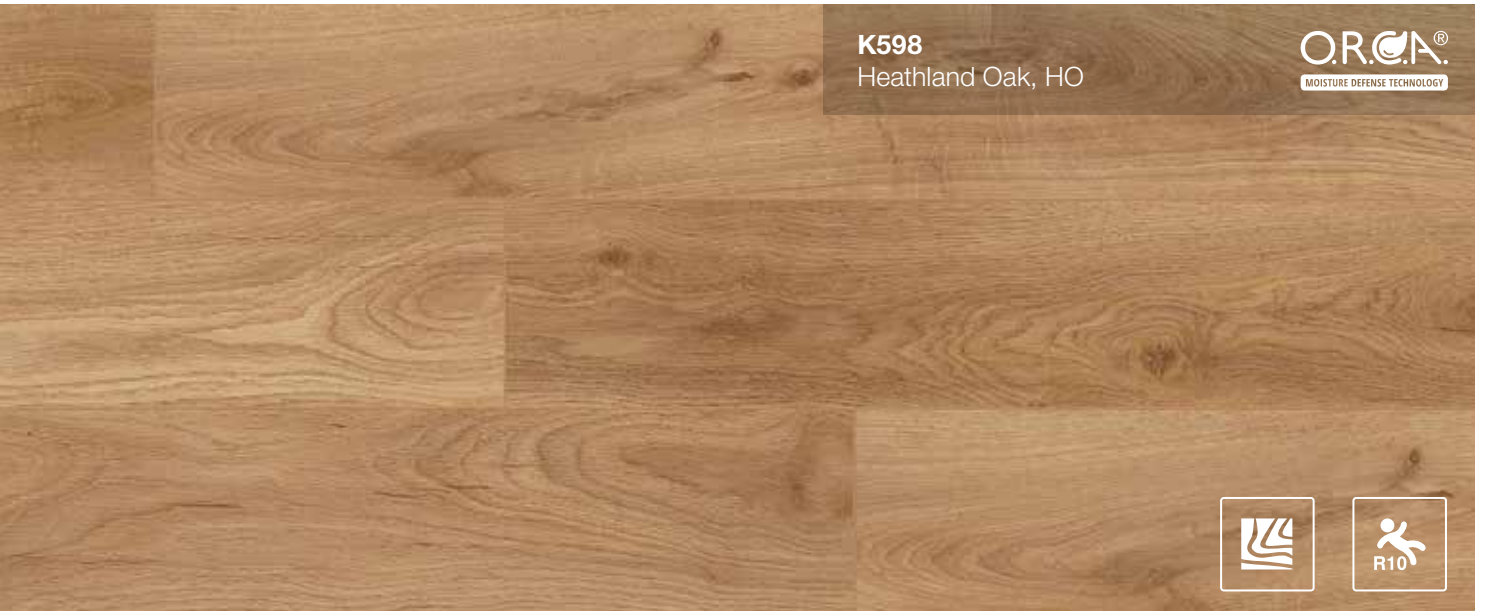


K598
Heathland Oak, HO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY

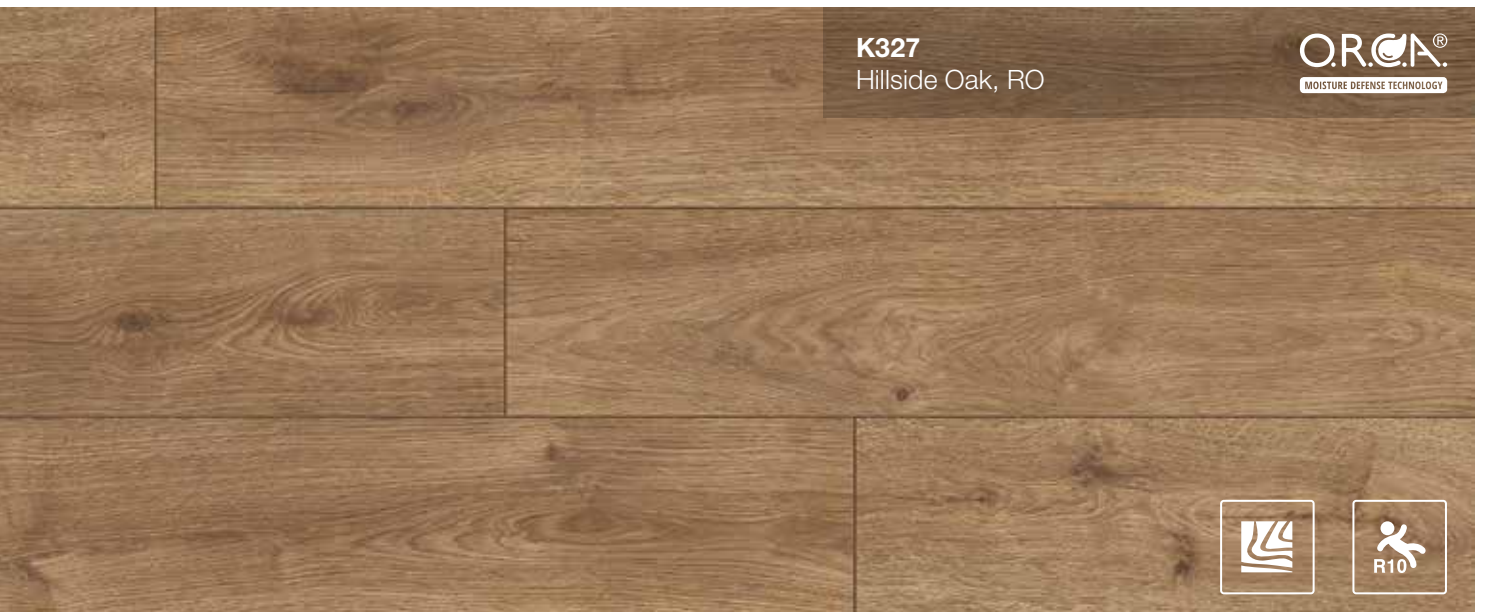

K327
Hillside Oak, RO

O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY

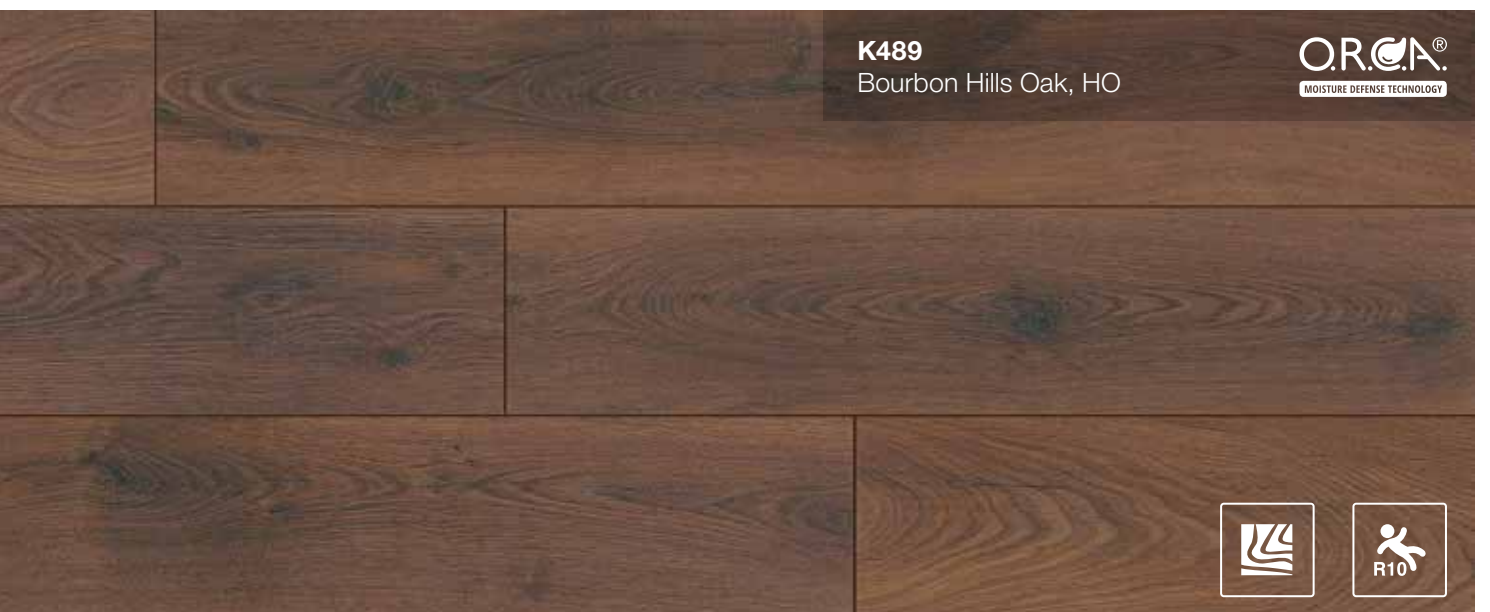

K489
Bourbon Hills Oak, HO


O.R.C.A.[®]
MOISTURE DEFENSE TECHNOLOGY



Format overview

organic
FLEX

inclusive PerfectPad® Cork




organic
FLEX

inclusive PerfectPad® Cork




organic
TOUCH

inclusive PerfectPad® Cork




organic
TOUCH

inclusive PerfectPad® Cork




organic
COMFORT SILENT

inclusive PerfectPad® Cork




organic
CLASSIC

available with PerfectPad® Cork / Eco



organic
CLASSIC

available with PerfectPad® Cork




organic
CLEVER LONG SILENT

inclusive PerfectPad® Eco




organic
CLEVER SILENT

inclusive PerfectPad® Eco






organic
CLEVER

available with PerfectPad® Cork / Eco



PerfectPad®

Integrated walking and impact sound insulation

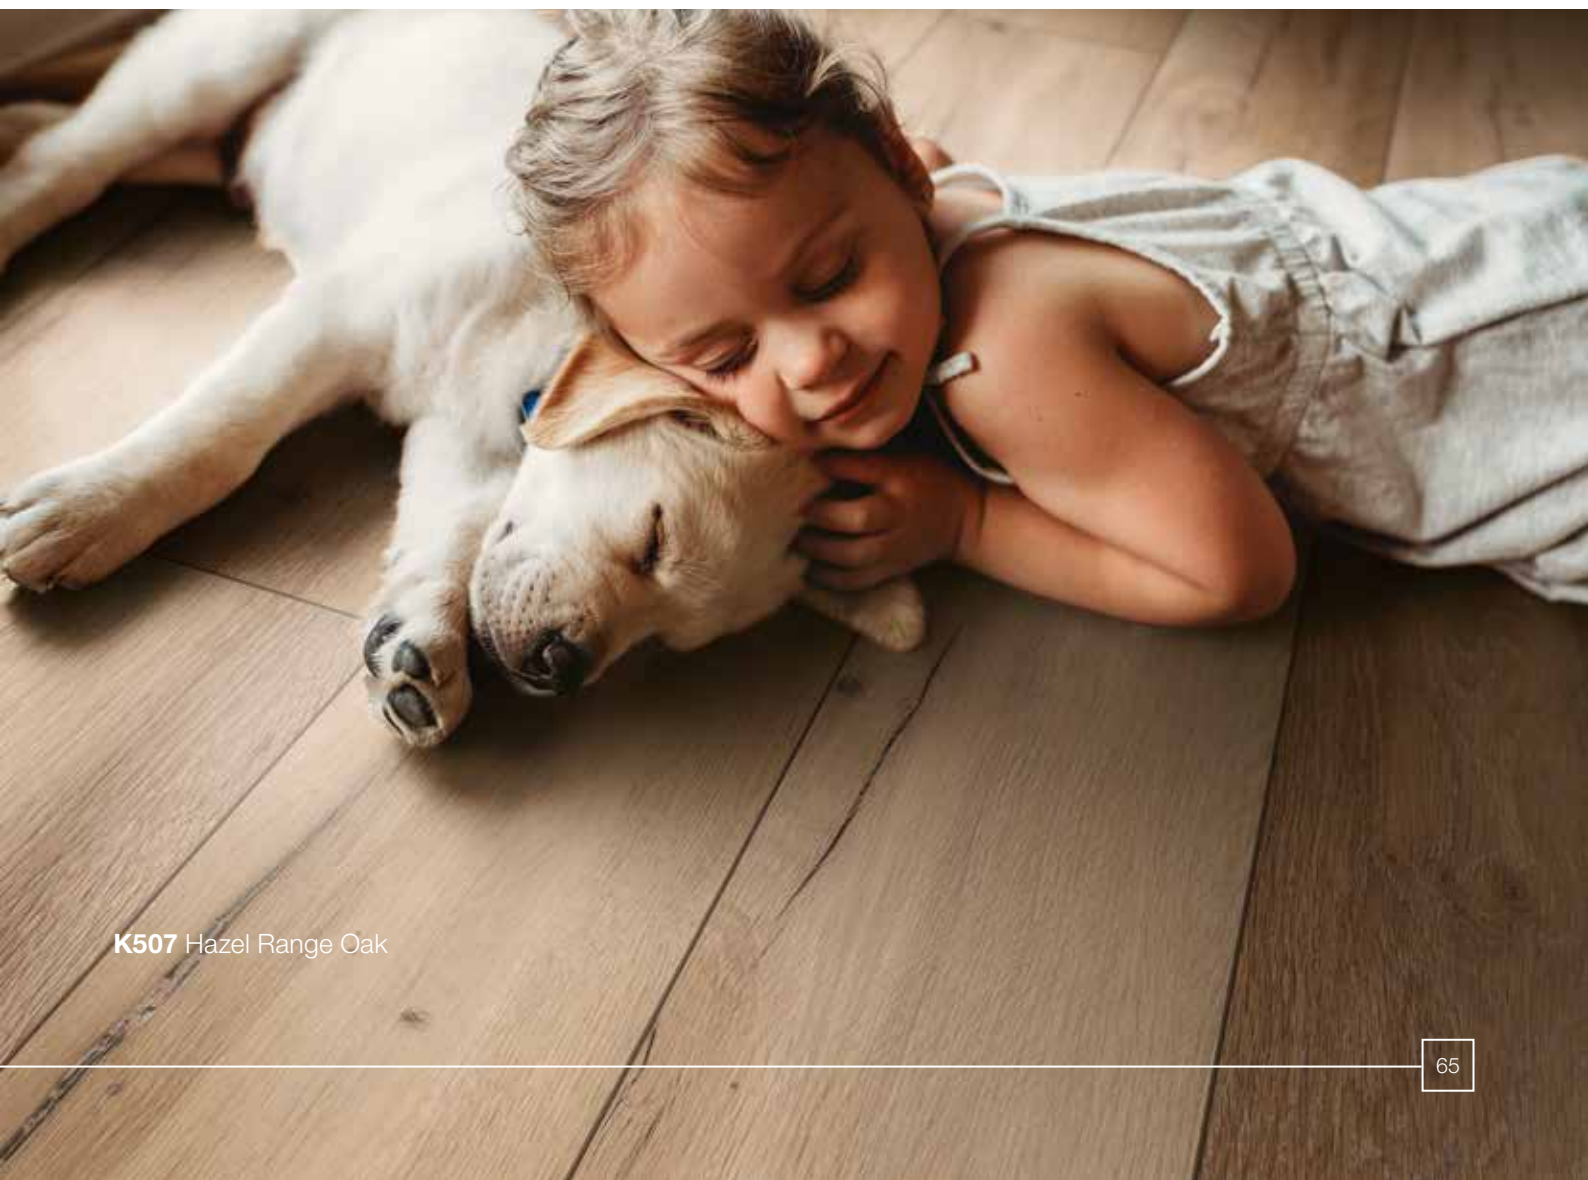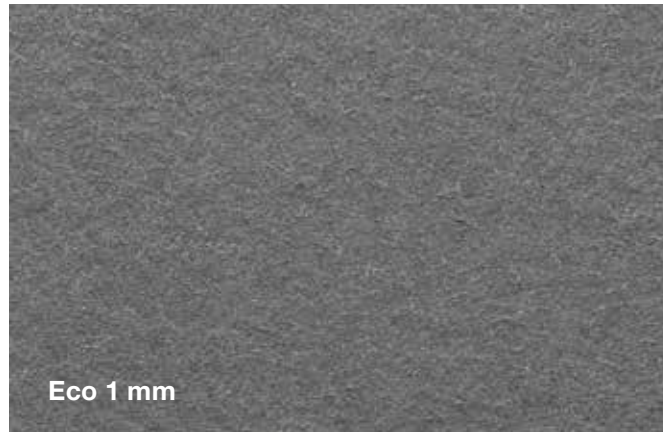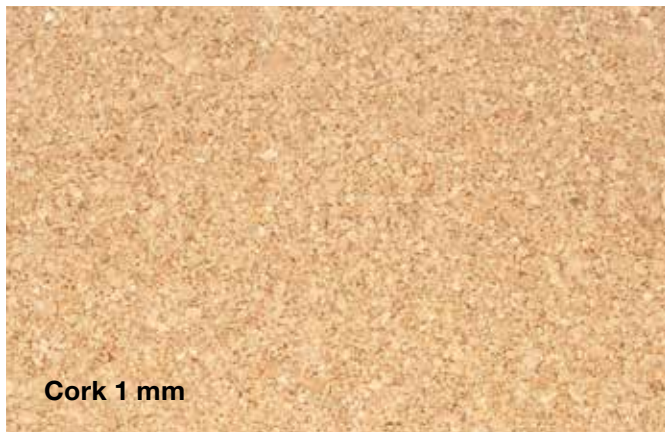

K507 Hazel Range Oak

Accessories that match your floor perfectly

Selected range of products

Every floor needs proper accessories. We can supply you with the ideal equipment for all types of flooring. One contact, one supplier – which makes everything so much simpler for you.

Underlays

Depending on the situation in the room, attention must be paid to the correct underlay material when installing the flooring. For this we offer multiple solutions.

Skirting boards

Choose from a range of skirtings in various decors that match all KronoOriginal® floors. Our advanced fixing system makes it quick and simple to achieve a perfect installation.

Additional accessories

If you still look for the proper skirting board, corner pieces, aluminium adhesive tape for sealing or you are done and wish to mop the floor, take a look at the following pages and discover the wide range of accessories.



Get more out of your O.R.C.A. products











With suitable accessories, you leave nothing to chance –

whether you are looking for the right underlay, skirting boards, end pieces, corners and profiles for a harmonious finish, practical tools or the right cleaning agent.










Discover
the full range!

Accessories

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit
Underlay PUR 1.0		98535 [EX PUR1.0_ORCA]	Material: PET film + polyurethane heavy-duty layer + non-woven material	1 x 10 m = 10 m ²
Underlay PUR 2.0		98571 [EX KO98571N]	Material: Polyurethan and mineral fillers	1 x 7.5 m = 7.5 m ²
Underlay WOOD 5.0		90171 [EX 90171.]	Material: Wood fibres	0.79 x 0.59 m x 15 = 7 m ²
PE foil		98111 [EX FOLIE2.0]	Material: Polyethylene	2 x 7.5 m = 15 m ²
Aluminium tape		98191 [EX ALUBAND]	Thickness: 0.048 mm Width: 50 mm	1 roll (50 m)
Transition profile, 2-part, screw-in		91231 91221	900 mm or 2700 mm	1 pcs.
Ramp profile, 2-part, screw-in		91251 91241	900 mm or 2700 mm	1 pcs.
End profile, 2-part, screw-in		91211 91201	900 mm or 2700 mm	1 pcs.
Transition click profile		98391 98381	900 mm or 2700 mm	1 pcs.
Ramp click profile		98411 98401	900 mm or 2700 mm	1 pcs.

Accessories

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit
End click profile		98371 98361	900 mm or 2700 mm	1 pcs.
3in1 profiles		95315 [EX 95315-A002] anodised stainless steel	1000 mm	10 pcs.
K58C skirting board for floors with O.R.C.A. (Moisture Defense Technology)		95316 [EX xxxxSLH-ORCA]	2600 x 58 x 18 mm	10 pcs.
K58C skirting board moisture resistant		97345 [EX SK58C-xxxx]	2400 x 58 x 18 mm	10 pcs.
Accessories for K58C skirting board		98011 98001 98021	External corners Internal corners End caps	90° in packs of 2 90° in packs of 2 in packs of 4, 2 left and 2 right
Mounting clips		91501 [EX 50510]	–	Box of 30 pieces, complete with screws and rawl plugs
Spacer		90292 [EX ABSTANDSKEIL]	–	30 spacer per bag
Clickguard™ joint sealant		90431 [EX 94270]	–	125 ml $\hat{=}$ ca. 10 m ²
Wax-repair set, mixable		90511 [EX F996]	–	7 wax blocks, 1 melting tool, 1 cleaning combed scraper, 1 green/white pad, 1 grey abrasive pad
Cleaner for floors with O.R.C.A. (Moisture Defense Technology)		90411 [EX REINIGER_ORCA]	–	750 ml

Skirting boards

Decor matching overview

	Collection Name	Decor	Skirting board	Decor	Skirting board	Decor	Skirting board
O.R.C.A. Flooring	Organic FLEX	K500	L133	K504	8836	K508	L137
		K501	4283	K505	8633	K509	L138
		K502	L134	K506	5542	K510	L139
		K503	L135	K507	L129		
	Organic TOUCH	O771	9002-white	O942	9002-white		
		O980	9002-white	O943	9002-white		
	Organic COMFORT SILENT	5953	9002-white	K453	8220	K329	9002-white
		K445	L130	K224	8634	K489	L131
	Organic CLASSIC	5947	8285	K385	8282	K406	8575
		K035	4375	K387	L061	K479	L105
		K224	8634	K389	8475	K665	L118
		K230	8836	K395	L071	K668	8206
		K231	L003	K405	R002	K669	L121
		K659	8220	K661	L119	K663	L144
		K660	8220	K662	L125	K664	L125
	Organic CLEVER LONG SILENT	5543	5543	K413	L064	K489	L131
		K063	9855	K452	4275	K598	5549
	Organic CLEVER SILENT	K327	8521	K488	L128		
		5543	5543	K413	L064	K489	L131
	Organic CLEVER	K063	9855	K452	4275	K598	5549
		K327	8521	K488	L128		

Decor overview

Flooring Type	Collection Name	Decors
O.R.C.A. Flooring	Organic FLEX	<p>K500 K503 K506 K501 K507 K504 K502 K505 K508 K509 K510</p>
	Organic TOUCH	<p>O771 O980 O942 O943</p>
	Organic COMFORT SILENT	<p>K445 ■ 5953 ■ K453 ■ K224 ■ K329 ■ K489 ■</p>
	Organic CLASSIC	<p>K668 K231 K669 K406 K405 K230 5947 K224 K665 K395 K479</p> <p>K385 K387 K035 K389</p>
	Organic CLEVER LONG SILENT	<p>K663 ■ K659 ■ K660 ■ K661 ■ K662 ■ K664 ■</p>
	Organic CLEVER SILENT	<p>5543 K063 K452 K413 K488 K598 K327 K489</p>
	Organic CLEVER	<p>5543 ■ K063 ■ K452 ■ K413 ■ K488 ■ K598 ■ K327 ■ K489 ■</p>


■ decor editions

Packaging information

Plank Size	Thickness	Planks/ Pack.	m ² sq ft/Pack.	Weight/Pack. [kg lbs]	Pack./Pallet = m ² sq ft
638 x 322 mm 25.12" x 12.68"	7 mm	12	2.47 26.53	16 35	32 = 79 849
1288 x 189 mm 50.71" x 7.44"	7 mm	10	2.43 26.19	16 35	52 = 127 1362
1383 x 159 mm 54.45" x 6.26"	8.5 mm	11	2.42 26.05	16 35	45 = 109 1173
1383 x 244 mm 54.45" x 9.61"	8.5 mm	7	2.36 25.42	16 36	45 = 106 1144
1288 x 195 mm 50.71" x 7.68"	7+1 mm	9	2.26 24.32	17 38	32 = 72 779
638 x 330 mm 25.12" x 12.99"	8 mm	11	2.32 24.92	17 38	32 = 74 797
1288 x 195 mm 50.71" x 7.68"	8 mm	9	2.26 24.32	17 36	52 = 118 1265
2003 x 245 mm 78.86" x 9.65"	6+1 mm	7	3.44 36.96	23 50	33 = 113 1220
1288 x 195 mm 50.71" x 7.68"	6+1 mm	9	2.26 24.32	13 29	52 = 118 1265
1288 x 195 mm 50.71" x 7.68"	6 mm	11	2.76 29.73	16 36	52 = 144 1546



Made by Kronospan



* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions). Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling – on a scale from A+ (very low-emission) to C (high-emission).

www.eco-institut.de/e/portfolio/emissions-dans-lair-interieur



www.krono-original.com
www.facebook.com/KronoOriginal



www.kronospan.com
info@krono-original.com