



Welcome to our world!

FEATURES GUIDE 04
PRODUCT OVERVIEW 06

Ørganic VENEER PARQUET	08	mo.re! Laminate Flooring	94
		HERRINGBONE 8	98
Rocko SPC Flooring	18	ALTITUDE	104
		ATLANTIC 12	110
O.R.C.A. Flooring	50	ATLANTIC 10	116
Ørganic FLEX	56	ATLANTIC 8	130
Ørganic TOUCH	66		
Ørganic CLASSIC	72	Classic Laminate Flooring	146
Ørganic CLEVER SILENT	86	SUPER NATURAL	150
		CASTELLO	172





www.krono-original.com

www.facebook.com/KronoOriginal















Features guide

Your benefits at a glance



All floors are put through a series of rigorous tests in order to comply with international quality standards, which is why we grant an extensive residential warranty with every product.



Robust

This flooring is amazingly robust due to its super durable surface. Moving furniture or falling objects are not a problem because of its high pressure and impact resistance.





Bevelled edges on all four sides of the plank ensure an authentic floorboard look.



Warm underfoot

Due to its flexible design layer, the flooring has comfortable haptics and is warm underfoot.

Real groove



Inspired by traditional craftsmanship, the true-edgebevels provide a harmonious room appearance.



Safety is something we put great emphasis on. Classification in anti-slip classes has been achieved through specially developed surface structures, which address the requirements for floor coverings in the workplace and commercial areas where a

Soft bevel



A.B.C. Anti Bacterial Comfort inhibits the growth of bacteria on your flooring and provides you with the peace of mind that comes from a healthy home

environment. Tested germs: Staphylococcus aureus





high risk of slipping is present.

Antibacterial comfort



The synchronous pores follow the grain of the decor, meaning they flawlessly mimic the character of natural wood.









natural wood.

Design diversity



are possible. This lends your flooring an authentic appearance that is virtually free of repetition.

The robust surface protects your flooring against microscratches that can be caused by strong mechanical stresses or the claws of house pets.

The flooring has a soft surface and feels very comfortable.

Microscratch protect



Thanks to the robust surface, which is also undaunted by small mishaps, the flooring is exceptionally well-suited for life with house-pets.

*

Real wood

Soft touch

This floor is made from real wood. The high-quality brushed oak surface gives every room natural elegance.

Pet-proof



The flooring is light-resistant: Even on days when the sun is shining for hours, your flooring remains non-fading according to rating 6 of the Blue Wool Scale.

Anti-static

The flooring provides complete protection against unpleasant shocks. The Anti-static is built-in and guaranteed for the life of the floor.

Lightresistant



Due to an integrated pad, the flooring reduces impact sound, echoes and vibrations. An additional underlay is not required, which saves time and money.

Silent





Product overview

Collection Name		Durability (Wear Resistance)	Coreboard (Water Protection)	Thickness
Veneer Parquet	∕ ganic ^{*1} VENEER PARQUET 1383 x 244 mm 54.45" x 9.61"	Titanium Ultra	moisture resistance technology	8.5 mm
SPC Flooring	ROCKO 1210 x 192 mm 47.64" x 7.56"	Titanium Ultra	SPC • SPC	5+1 mm PerfectPad®IXPE
	1210 x 192 mm 47.64" x 7.56" 1210 x 234 mm 47.64" x 9.21" 1210 x 295 mm 47.64" x 11.61"	Titanium Ultra	SPC SPC	5 mm
O.R.C.A. Flooring	Ørganic⁴ FLEX 638 x 322 mm 25.12" x 12.68" 1288 x 189 mm 50.71" x 7.44"	Titanium Ultra	water proof O.R.C.N. MOISTURE DEFENSE TECHNOLOGY	7 mm PerfectPad® Cork
	∕ grganic¹¹ TOUCH 1383 x 159 mm 54.45" x 6.26" 1383 x 244 mm 54.45" x 9.61"	AC5	waterproof O.R.C.N. MOISTURE DEFENSE TECHNOLOGY	8.5 mm PerfectPad®Cork
	Ørganic⁺¹ CLASSIC 638 x 330 mm 25.12" x 12.99" 1288 x 195 mm 50.71" x 7.68"	AC5	waterproof O.R.C.N. MOISTURE DEFINSE TECHNOLOGY	8 mm
	Ørganic¹¹ CLEVER SILENT 1288 x 195 mm 50.71" x 7.68"	AC5	waterproof O.R.C.N. MOISTURE DEFINES TECHNOLOGY	6+1 mm PerfectPad® Eco
mo <i>r</i> el Laminate Flooring	HERRINGBONE 8 630 x 126 mm 24.80" x 4.96"	AC5	moisture resistance technology	8 mm
	ALTITUDE 2003 x 245 mm 78.86" x 9.65"	AC5	mø:re!	12 mm
	ATLANTIC 12 1288 x 195 mm 50.71" x 7.68"	AC5	mø:re!	12 mm
	ATLANTIC 10 1288 x 195 mm 50.71" x 7.68"	AC5	mø:re!	10 mm
	ATLANTIC 8 638 x 330 mm 25.12" x 12.99" 1288 x 195 mm 50.71" x 7.68"	AC4	moisture resistance technology	8 mm
ssic	SUPER NATURAL 1288 x 195 mm 50.71" x 7.68"	AC4	HDF	8 mm
Classic Laminate Flooring	CASTELLO 1285 x 192 mm 50.59" x 7.56"	AC4	HDF	8 mm

^{* 1} Consists of natural wood and an organic chemical binde

^{*2} Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance — Assembled joint)

^{*3 24} h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com, up to 100 h no leakage based on ISO 4760:2022-05

Pet-proof	Utilization Class	Residential Guarantee' ⁵	Bevel	Joint	Authentic Embossed	SKUs
*	32	20 years	Soft Bevel	Tap Loc	-	6
*	34	30 years	V4	1clic 2go pure	-	8
*	34	30 years	V4	1clic 2go pure	-	24
*	34	30 years	V4	1clic 2go pure+	-	11
*	33	30 years	Soft Bevel	Tap Loc	-	4
*	33	30 years	V4	1clic 2go pure+	Yes* ⁶	15
*	32	20 years	V4	1clic 2go pure+	Yes	8
*	32	20 years	V4	Fold Down	Yes	4
*	33	30 years	V4	1clic 2go pure+	Yes	6
*	33	30 years	V4	1clic 2go pure+	Yes	6
*	33	30 years	V4	1clic 2go pure+	Yes	15
*	32	20 years	V4	1clic 2go pure+	Y es⁺ ⁶	21
*	32	20 years	V4	1clic 2go pure+	Y es ^{*6}	27
*	32	20 years	-	twin clic	-	6

161 SKU

^{*4 24} h surface water protection as stipulated by NALFA and 48 h splash-water protection according to works standard KRONOSPAN WN-103, www.floor-with-more.com

^{*5} According to warranty terms *6 Selected decors



The sustainable alternative to parquet

These wooden floorings are luxurious, cosy and natural. The high-quality brushed oak surface lends homely flair to any room. With the Veneer Parquet series, KRONOSPAN offers authentic wood floors with a real wood veneer as the top layer.



The special thing about it: KRONOSPAN combines the natural properties of the raw material wood with the technical refinements of a multi-layer construction. The top layer consists of a 0.6 millimeter wood veneer – the wood comes exclusively from sustainable forestry. The middle layer consists of a high-density fibreboard (HDF). This makes the flooring particularly stable and durable. Thanks to these properties, Veneer Parquet is a resource-saving and sustainable alternative to conventional parquet flooring.



The innovative feature, mo.re! technology, is the intelligent moisture protection. This means the real wooden surface of the floor is also protected for just in case.




Real wood



Feel the nature



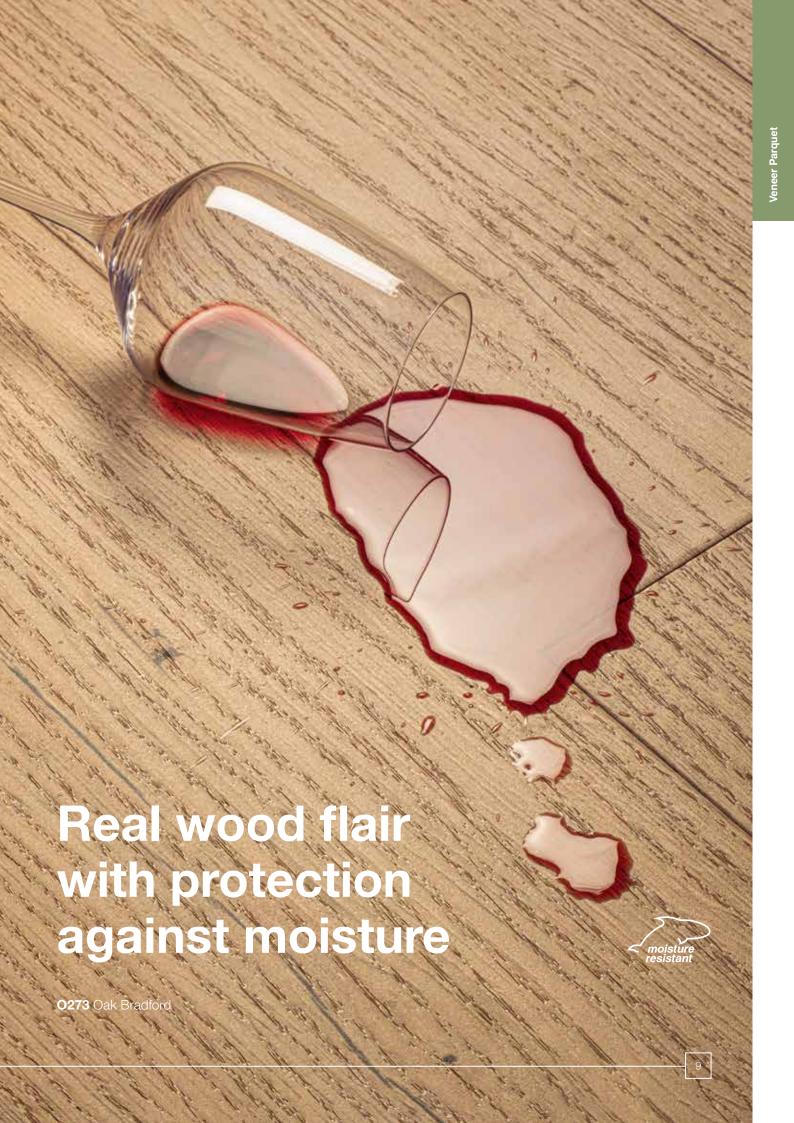





Residential guarantee



Utilization class



Soft bevel

Ultramatt surface

Real wood flair

Eco-friendly

Wood from sustainably managed forests

Moisture resistant*

thanks to mo.re! technology

Soft bevel

True-Edge-Bevel for a harmonious room appearance

Easy installation

Ideal for renovations thanks to low profile height

Modern wide planks: 1383 x 244 mm

Amazing designs

^{*} Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance — Assembled joint)





rganic **VENEER PARQUET**





8.5 mm

1383 x 244 mm | 54.45" x 9.61"

Tap Loc



















































Waterproof SPC flooring with superior performance

Innovative SPC floors with unique design

Waterproof Rocko Flooring, made of over 70% of mineral core, finished with high-quality UV coating, is an outstanding material for domestic and commercial use, both in new projects and renovations.

Appearance of natural wood & stone

Rocko Flooring designs are digitally printed, reflecting the smallest detail, the rich grain of wood and roughness of stones and concrete.

Ensured stability

Rocko Flooring range is set apart from other types of vinyl flooring by its unique resilient core, which provides an incredibly stable base for each flooring plank and ensures dimensional stability, even with high temperature fluctuations.


Coordinated solution

Available in 3 different formats, allows for any design finishing, going beyond the standard flooring frame. It comes with complementary accessories: waterproof flooring skirting boards, underlay and cleaning liquid for coordinated solution.



Check out the complete collection!



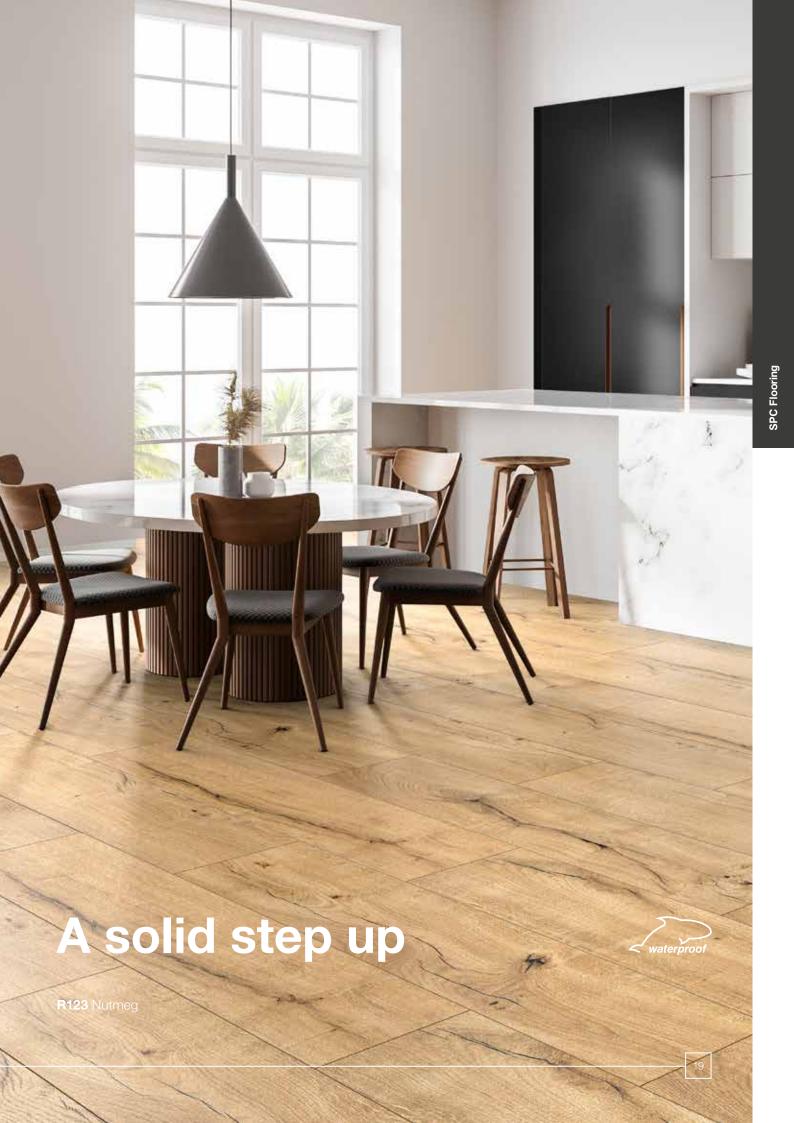







Waterproof

Rocko Flooring is suitable for indoor use in humid conditions, such as bathroom, laundry room, kitchen or vestibule.

Dimensional stability

Rocko Flooring does not change its dimensions under the influence of temperature and humidity changes. It can be used in sunny and shaded areas as well as in dry and humid ones.

Utility class

Due to its parameters, Rocko Flooring reaches the highest utility class. It can be used in intensively used domestic areas as corridor or kitchen, as well as in commercial spaces with high traffic, such as offices.

Underfloor heating

Rocko Flooring is well suited for underfloor heating, thanks to its mineral content and its very good thermal conductivity parameters.

V-groove

Real v-groove on 4 sides of each plank.





ROCKO

with **Perfect**Pad® IXPE 1 mm



Thickness: **5+1 mm**

Format:

1210 x 192 mm | 47.64" x 7.56"

Lock:

1clic 2go pure









EN 16511





















































ROCKO



Thickness:


5 mm

Formats:

1210 x 192 mm | 47.64" x 7.56" 1210 x 234 mm | 47.64" x 9.21" 1210 x 295 mm | 47.64" x 11.61"

Lock:

1clic 2go pure











EN 16511


















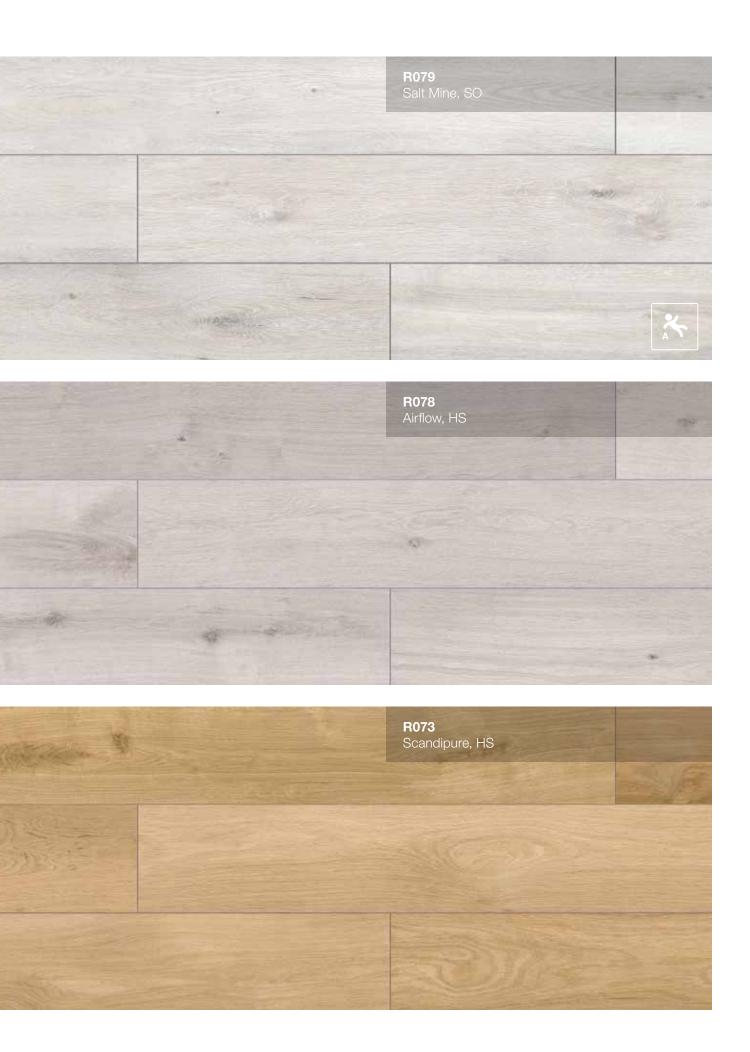









































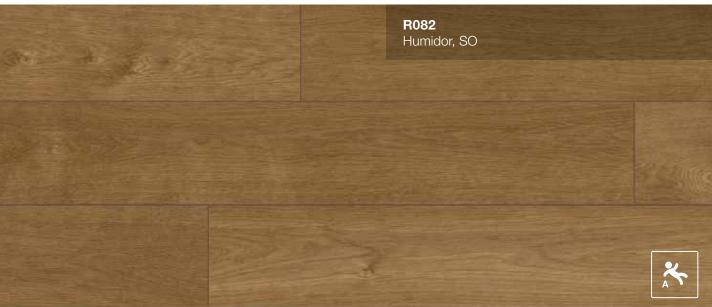

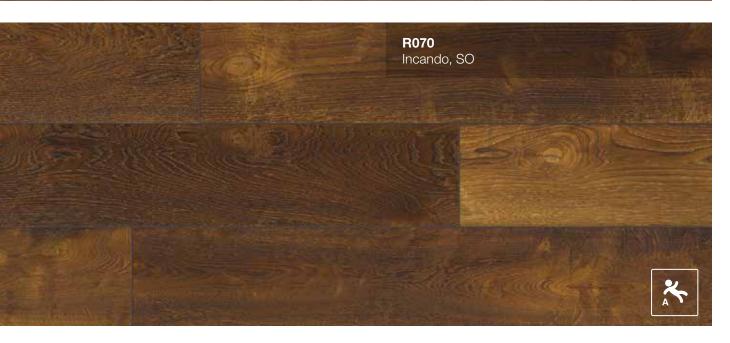









































































How O.R.C.A. technology works





Wood's self sealing property

Wood expands when exposed to moisture and in doing so seals itself, preventing liquid penetration.

Boat builders take advantage of wood's natural self sealing property.

Wine barrels are still sealed using this time tested method.





The floor that combines the best

O.R.C.A. = **O**rganic*¹ **R**igid **C**oreboard **A**brasion-proof

O.R.C.A. is twice as good

It unites the best qualities of biologically based floors and conventional waterproof floor coverings. In O.R.C.A., organic*1 materials are made resistant to liquids by means of a special technology.

O.R.C.A. makes the flooring usable anywhere

The innovative O.R.C.A. board makes it possible to install the flooring even in private bathrooms*2 where, until now, only vinyl or tiles could be used. Furthermore, thanks to their outstanding thermal stability and non-fading properties, O.R.C.A. products also can be used in conservatories and rooms with floor-to-ceiling windows.

O.R.C.A. floors are extremely robust

The robust surface with an AC5 durability rating, protects the flooring against microscratches that can be caused by strong mechanical stresses such as moving furniture, falling objects or the claws of house pets. Thanks to its durable properties, which are also undaunted by small mishaps, O.R.C.A. floors are exceptionally well-suited for life with house pets.

O.R.C.A. is built better because it is more elaborately manufactured

The wood fibers are mechanically processed multiple times in a special production process to obtain especially small fibers. Further on in the manufacturing process a specially developed, organic-chemical binding agent surrounds even the finest fibers and isolates them from moisture.



The floor that's not afraid of water

100 h+ splash-water protection quaranteed*3

Little accidents occur almost daily. Wherever such things are bound to happen, it's worth relying on O.R.C.A. Kitchen, dining room, bathroom – O.R.C.A. is a perfect fit.



Scan the QR code and convince yourself!

- *1 Consists of natural wood and an organic chemical binder
- *2 Please observe installation instructions
- *3 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, www.100hour-test.com, up to 100 h no leakage based on ISO 4760:2022-05



So reliable you can afford to take the plunge





The flooring that is naturally nature-friendly







Sustainable

Sustainability isn't just a buzzword for us, but part of our corporate strategy. It would never cross our minds to use wood that didn't come from sustainably managed forests.

CO₂-negative

O.R.C.A. boards are CO₂-negative because manufacturing O.R.C.A. releases less CO₂ than was stored by the tree.

Organic

Our O.R.C.A. board consists of components based on biological raw materials and organic-chemical binding agents (synthetic resins) and thus is organic.

PVC-free

Our O.R.C.A. products contain no PVC*.





^{*} May contain traces of PVC, e.g. from packaging







with PerfectPad® Cork 1 mm





Thickness **7 mm**

Formats:

638 x 322 mm | 25.12" x 12.68" **1288 x 189 mm |** 50.71" x 7.44"

Lock:

1clic 2go pure+











EN 16511






































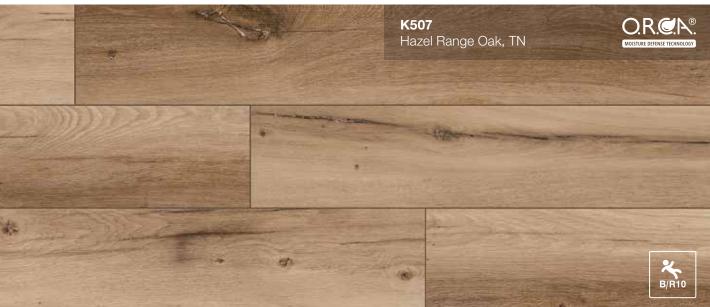

























rganic TOUCH

with PerfectPad® Cork 1 mm





Thickness: **8.5 mm**

Formats:

1383 x 159 mm | 54.45" x 6.26" **1383 x 244 mm** | 54.45" x 9.61"

Lock: **Tap Loc**









EN 13329
















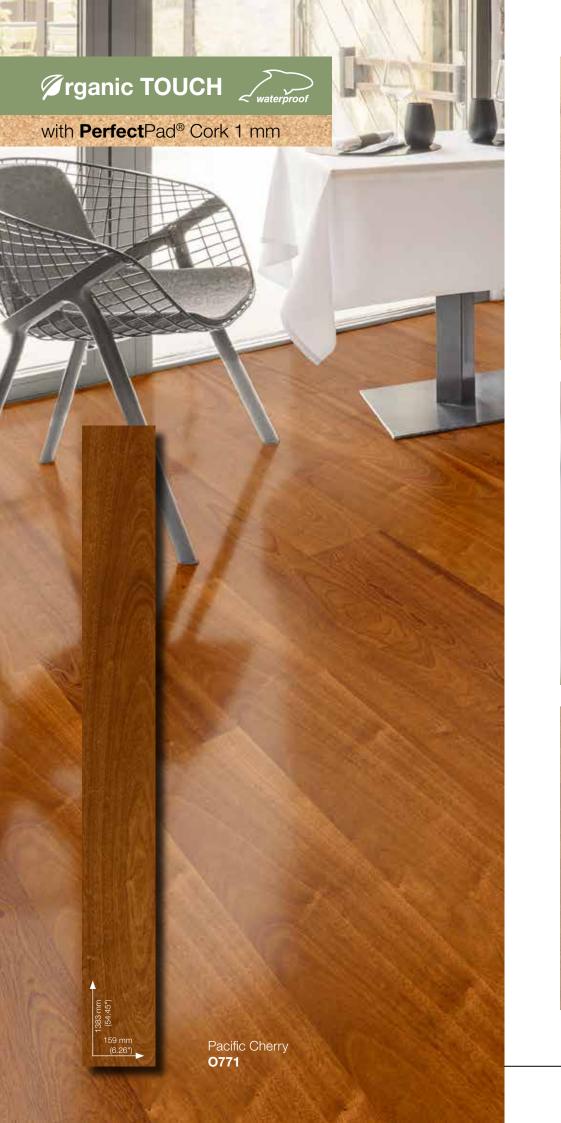

































Thickness: 8 mm

Formats:

638 x 330 mm | 25.12" x 12.99" **1288 x 195 mm** | 50.71" x 7.68"

Lock:

1clic 2go pure+











EN 13329








































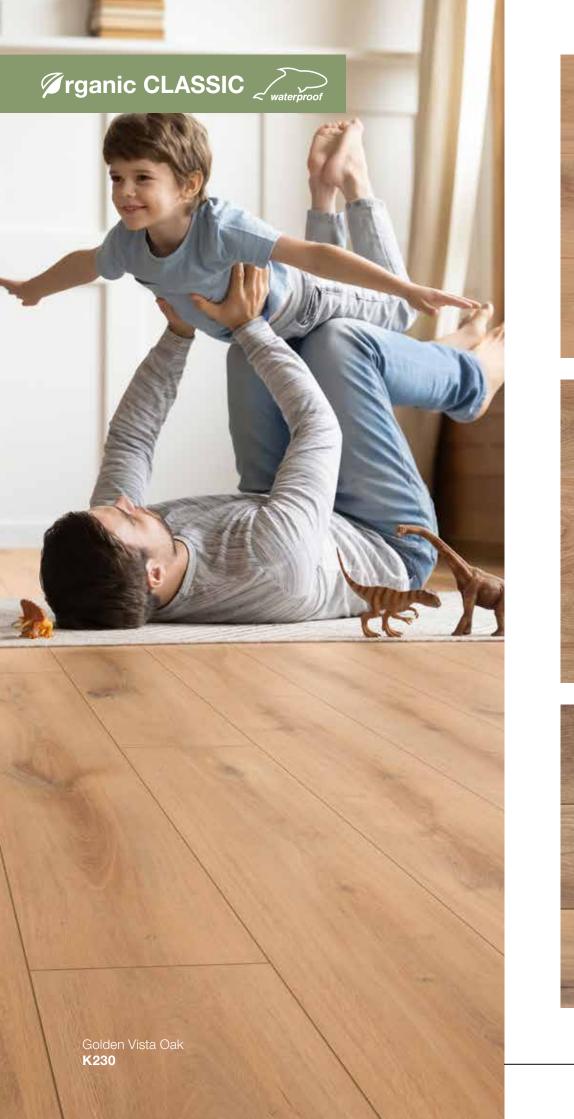



















































with **Perfect**Pad® Eco 1 mm





Thickness **6+1 mm**

Format

1288 x 195 mm | 50.71" x 7.68"

Lock:

1clic 2go pure+









EN 13329































































Laminate Flooring Take more. Endure more. Withstand more.

mo.re! from KRONOSPAN is a moisture-resistant laminate flooring product that makes laminate even more practical for everyday life.



mo.re! makes laminate flooring even more moisture-resistant. And that's a good thing. After all, small everyday mishaps can happen to anyone.

How mo.re! technology works

mo.re! is based on a specially developed substrate formula.


Its new binding agent makes the flooring more durable and decreases swelling – improving resistance to moisture penetration.



Scan the QR code and check out the mo.re! features!

^{* 24} h surface water protection as stipulated by NALFA and 48 h splash-water protection according to works standard KRONOSPAN WN-103, www.floor-with-more.com-



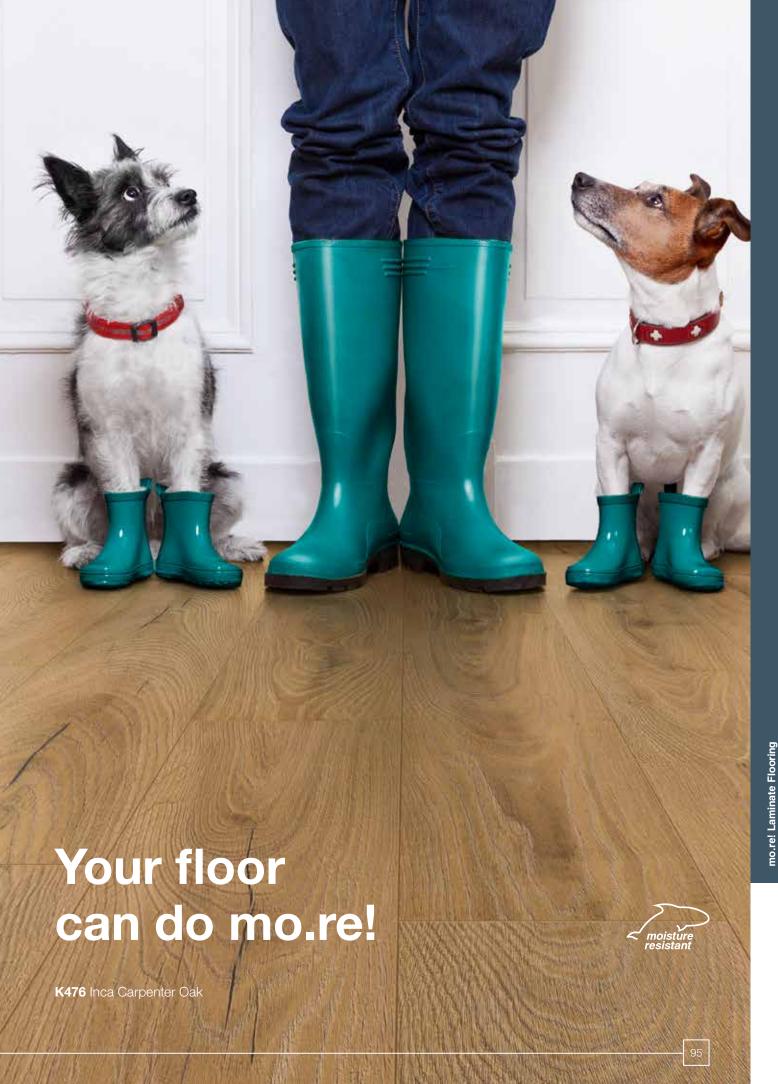







It is **much more moisture-resistant** than traditional laminate flooring


It is $\textbf{A.B.C. surface}^{\star}$ inhibits bacteria growth on floors to protect your family

It is **light-resistant**: Even on days when the sun is shining for hours, your flooring remains nonfading according to rating 6 of the Blue Wool Scale.

It is **perfect for life with house pets** – the robust and hard-wearing surface masters the everyday challenges of households with pets

It is great for installation in private bathrooms**

It is available in **utilization classes 32 and 33** according to DIN EN 13329

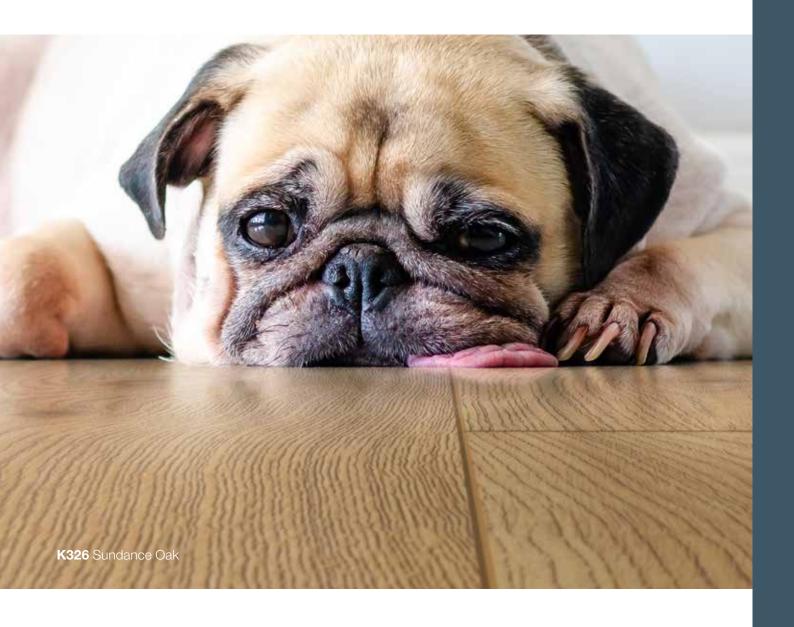



mo.re! for the environment

mo.re! offers more, even for the environment

It is made using only wood from sustainably managed forests. And KRONOSPAN does not use any PVC in flooring with the mo.re! technology. This demonstrates our commitment to environmental stewardship. mo.re! substrate is CO_2 -negative: Processing a tree to make this product emits less CO_2 than the tree has stored in its life.





 $^{^{\}star}$ May contain traces of PVC, e.g. from packaging

HERRINGBONE 8





Thickness:

8 mm

Format:

630 x 126 mm | 24.80" x 4.96"

Lock:

Fold Down




































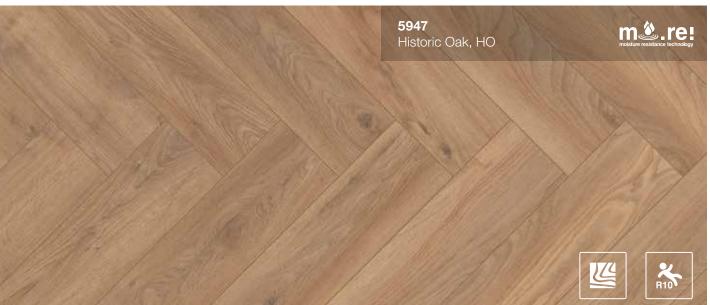

















ALTITUDE





Thickness: 12 mm

Format:

2003 x 245 mm | 78.86" x 9.65"

Lock:

1clic 2go pure+









EN 13329









































ATLANTIC 12





Thickness: 12 mm

Format:

1288 x 195 mm | 50.71" x 7.68"

Lock:

1clic 2go pure+









EN 13329




































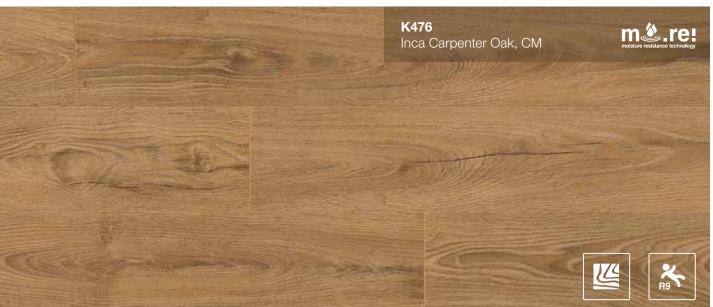



ATLANTIC 10





Thickness: 10 mm

Format:

1288 x 195 mm | 50.71" x 7.68"

Lock:

1clic 2go pure+









EN 13329




















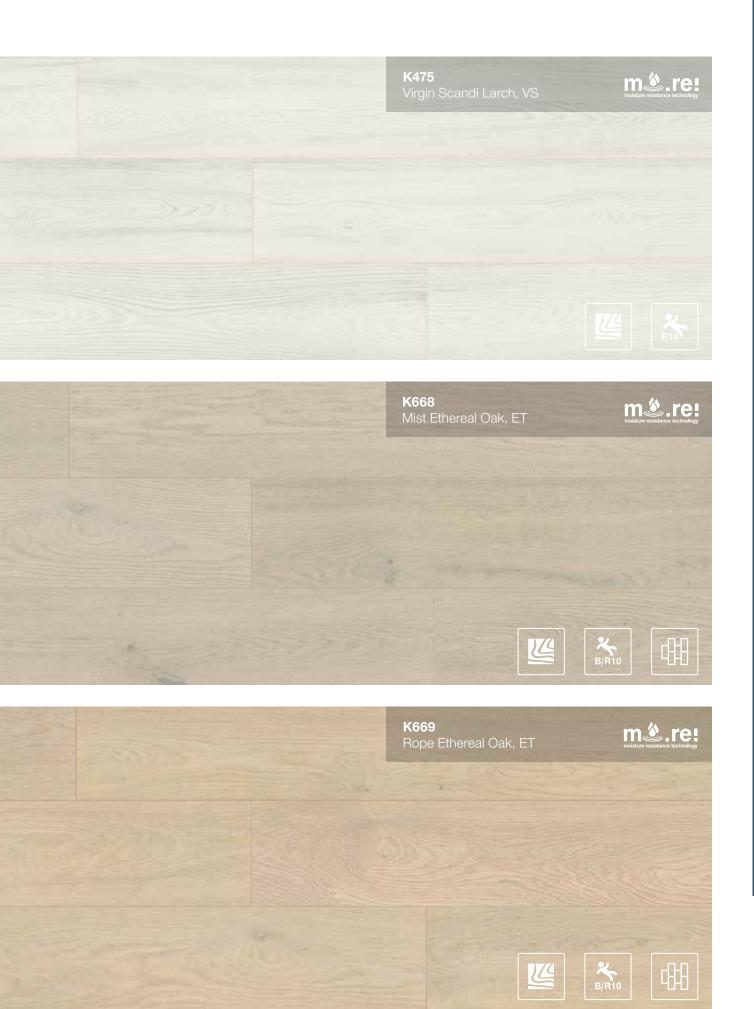

































































ATLANTIC 8





Thickness: 8 mm

Formats:

638 x 330 mm | 25.12" x 12.99" **1288 x 195 mm** | 50.71" x 7.68"

Lock:

1clic 2go pure+











EN 13329












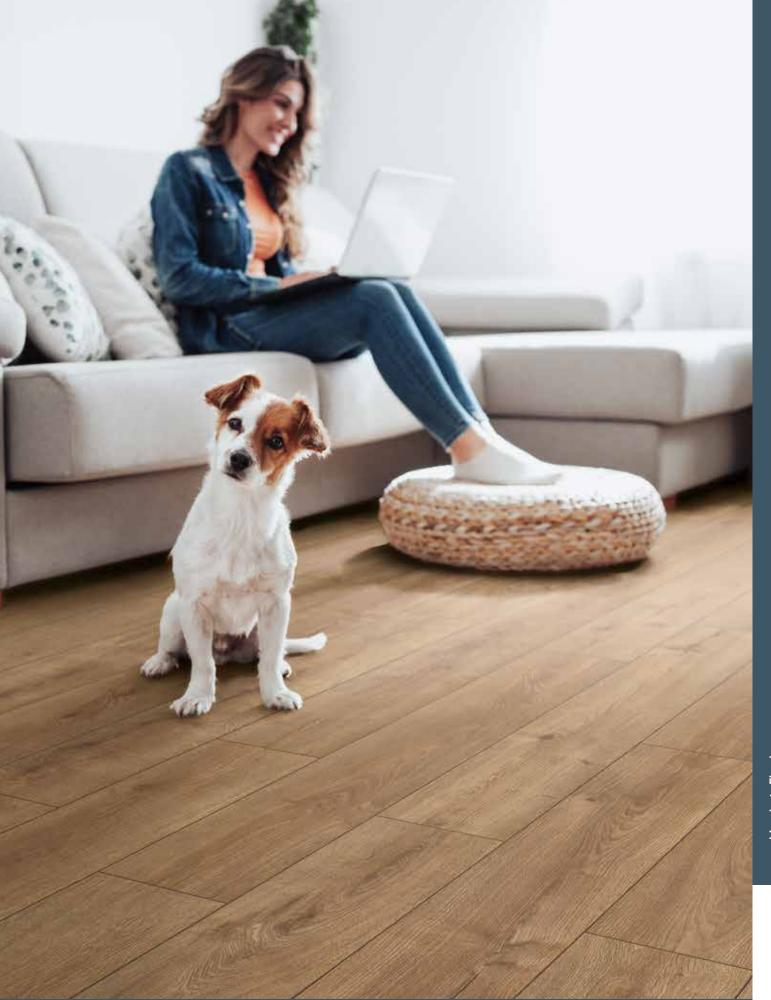




















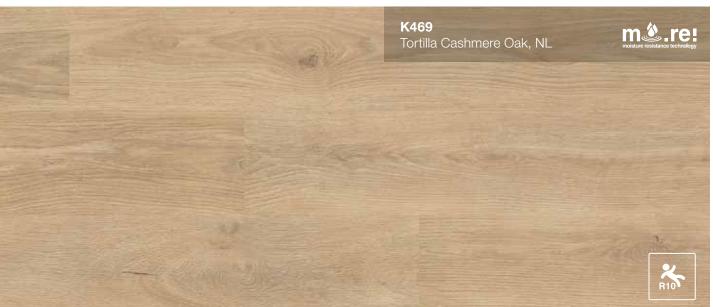






















































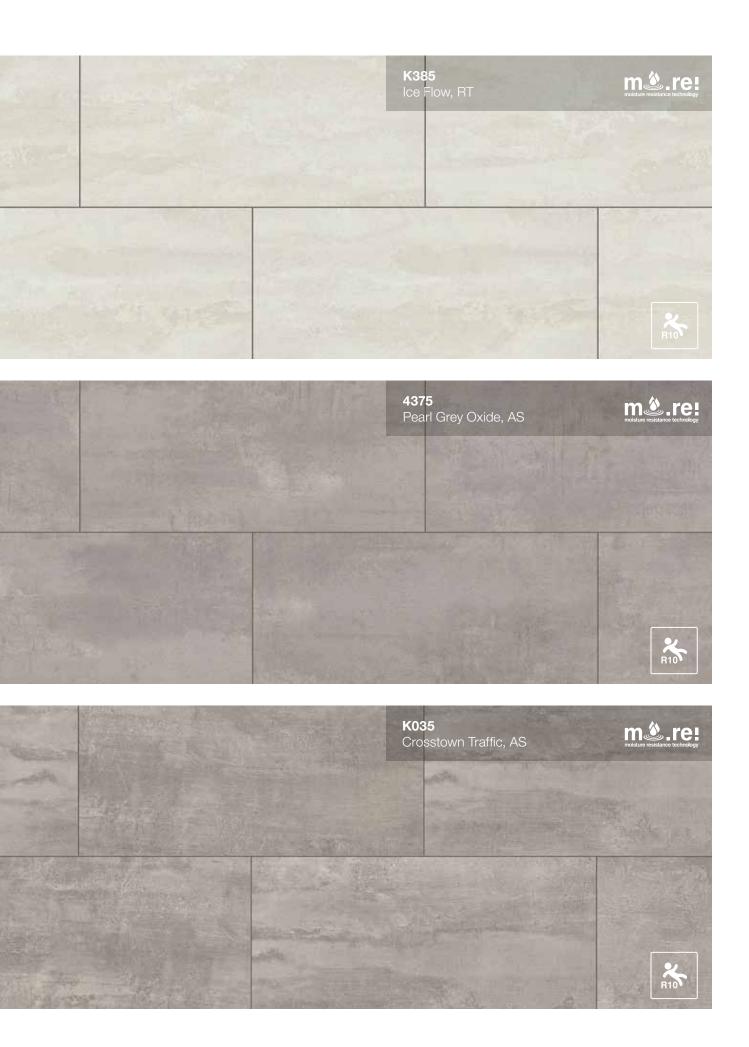












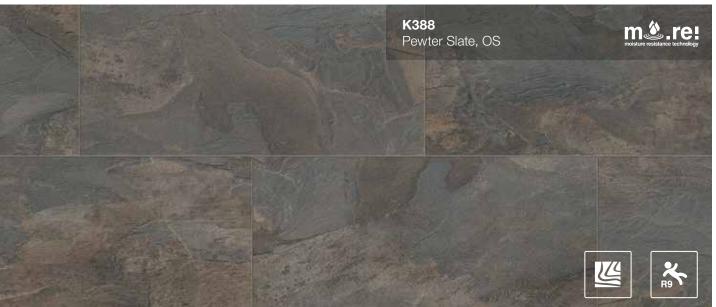





Give your surroundings a unique flair



Laminate enjoys a fantastic reputation as an absolute all-rounder. There is hardly an area or room that is not suitable for its installation. Whether children's rooms or living rooms, offices or shops, with or without pets – laminate flooring is a beautiful and uncomplicated partner thanks to its robustness and durability.

The list of advantages of laminate flooring is long – easy to clean and therefore hygienic, anti bacterial thanks to surface structures that bacteria cannot adhere to, light-resistant and hard-wearing. Last but not least, there is the range of decors and surfaces, that leave nothing to be desired.

Authenticity you can see and feel

Very close to the original – these are laminate decors, whose appearance is made up of two factors – image and surface.

Color and light form the symbiosis for a perfect reproduction of wood, stone and tiles. And the perfect optical representation is complemented by the tactile reproduction. Vision and touch, the interaction of the senses.











Easy to install

The sophisticated KronoOriginal® click systems make installation child's play. The prerequisite is good preparation – having all panel materials, accessories and tools at the ready, as well as planning with the help of the checklist and the appropriate instructions.

The floor for every requirement


An important factor when choosing a laminate floor is the utility class. The more a room is frequented and therefore the floor is challenged, the higher the usage class has to be. The utility class describes the possible stress on the entire panel and thus indicates whether the flooring is recommended mainly for private or also for commercial use. This consideration is important regarding to the warranty conditions.

Utilization class 32 (EN 13329) Suitable for heavy domestic and medium commercial use







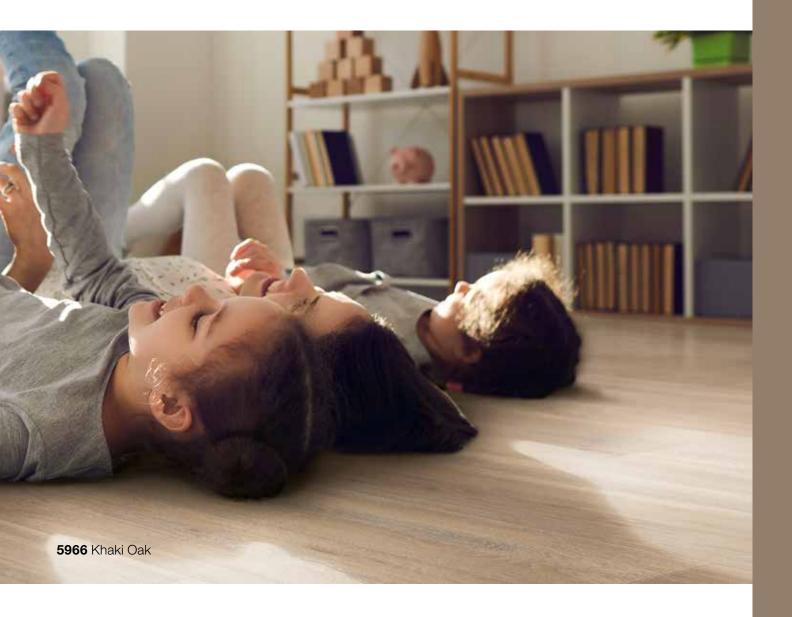





Healthy living

A.B.C. – Anti Bacterial Comfort ensures that bacteria*1, dust mites and microbes have no chance of settling on them. This makes cleaning the laminate flooring easier and quicker and therefore particularly hygienic.

Healthy living also means that additives such as PVC*2, chloride or wood preservatives are not used and can therefore neither trigger nor intensify allergies.

Sustainable

Laminate flooring consists of around 90 percent natural wood, which comes exclusively from sustainably managed forestry. This is guaranteed by the PEFC certificate.

Generally, all production processes are low-emission and therefore sustainable.



^{*1} Tested germs: Staphylococcus aureus *2 May contain traces of PVC, e.g. from packaging

SUPER NATURAL

Thickness 8 mm

Format:

1288 x 195 mm | 50.71" x 7.68"

Lock:

1clic 2go pure+









EN 13329










































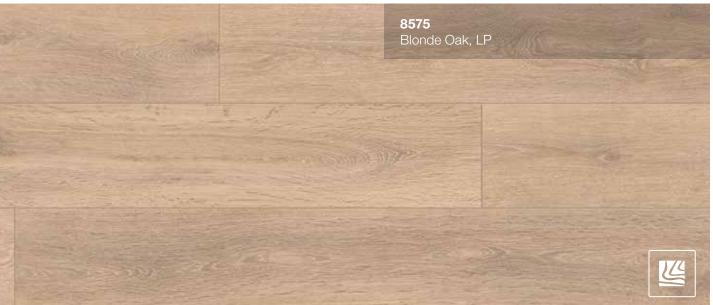














































































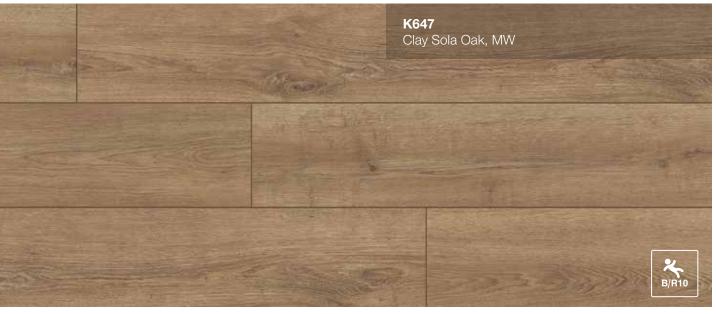

















CASTELLO

8 mm

Format: **1285 x 192 mm** | 50.59" x 7.56"

Lock:

Twin clic









EN 13329






































Format overview



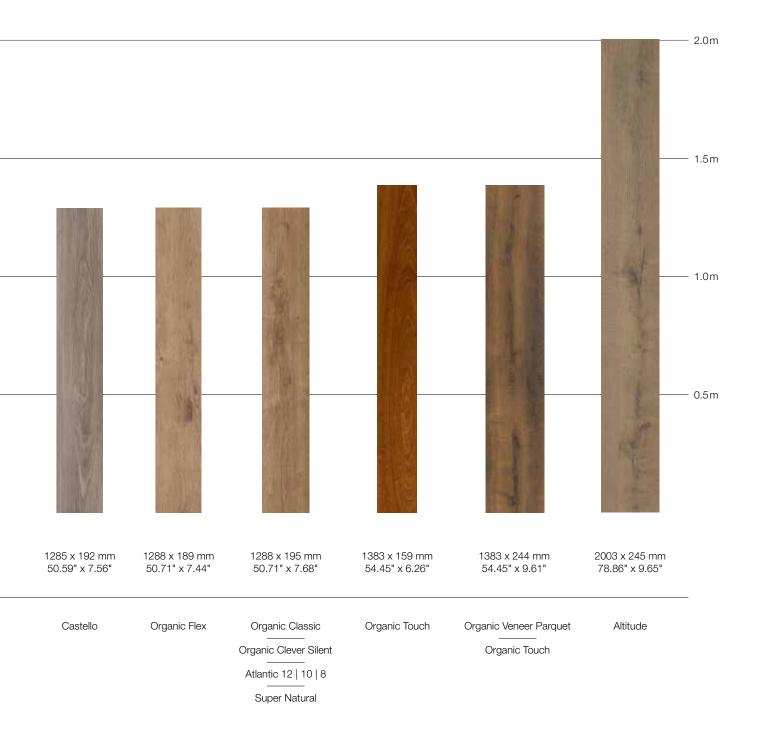



Accessories that match your floor perfectly

Selected range of products

Every floor needs proper accessories. We can supply you with the ideal equipment for all types of flooring. One contact, one supplier – which makes everything so much simpler for you.

Underlays

Depending on the situation in the room, attention must be paid to the correct underlay material when installing the flooring. For this we offer multiple solutions.

Skirting boards

Choose from a range of skirtings in various decors that match all KronoOriginal® floors. Our advanced fixing system makes it quick and simple to achieve a perfect installation.

Additional accessories

If you still look for the proper skirting board, corner pieces, aluminium adhesive tape for sealing or you are done and wish to mop the floor, take a look at the following pages and discover the wide range of accessories.



All under one roof

Our guidance system shows the matching products for different types of floor.



Ørganic VENEER PARQUET: Height: 8.5 mm



SPC flooring:

Height: 5 mm and 5+1 mm, including silent pad, floating installation



O.R.C.A. flooring:

Height: 6+1, 7 and 8 mm, organic rigid coreboard, floating installation



Laminate flooring: Height: 8, 10 and 12 mm

Underlays

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Underlay PUR 1.0		98535 [EX PUR1.0_ORCA] 98535 [EX PUR1.0_SPC]	Material: PET film + polyurethane heavy- duty layer + non-woven material	1 x 10 m = 10 m ²	Veneer Parquet SPC Rooring O.R.C.A. Rooring Rooring
Underlay PUR 2.0		98571 [EX KO98571N]	Material: Polyurethan and mineral fillers	1 x 7.5 m = 7.5 m ²	Veneer Parquet SPC O.R.C.A. Flooring Control Flooring Flooring
Underlay WOOD 5.0		90171 [EX 90171.]	Material: Wood fibres	0.79 x 0.59 m x 15 = 7 m ²	Veneer Parquet SPC O.R.C.A. Flooring Flooring Flooring
Underlay XPS 5.0		98536 [EX XPS5.0]	Material: Extruded polystyrene	1.18 x 4.7 m = 5.5 m ²	Veneer Parquet SPC O.R.C.A. Flooring Control Flooring Rooring
Underlay XPS 2.2 ALU		98515 [EX XPS2.2ALU]	Material: HFPS-foam & moisture protection foil	1.2 x 12.5 m = 15 m ²	Veneer SPC O.R.C.A. Caminate Flooring Control Flooring Control Control Flooring Control Cont
PE foil		98111 [EX FOLIE2.0]	Material: Polyethylene	2 x 7.5 m = 15 m ²	Veneer Parquet SPC Flooring O.R.C.A. Flooring Flooring
Aluminium tape	0	98191 [EX ALUBAND]	Thickness: 0.048 mm Width: 50 mm	1 roll (50 m)	Veneer Parquet SPC Rooring O.R.C.A. Laminate Rooring



Skirting boards

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
K58C	R	91061 [EX xxxxSLH]	2600 x 58 x 18 mm	10 pcs.	Veneer SPC O.R.C.A. Parquet Flooring Rooring
K58C skirting board moisture resistant	2	97345 [EX SK58C-xxxx]	2400 x 58 x 18 mm	10 pcs.	Veneer Parquet SPC Plooring O.R.C.A. Laminate Flooring
K58C skirting board for floors with O.R.C.A. (Moisture Defense Technology)	d	95316 [EX xxxxSLH-ORCA]	2600 x 58 x 18 mm	10 pcs.	Veneer SPC Parquet SPC Flooring CARCA Flooring CARCA Flooring
Square cut skirting board		95951 [EX 9002DS19_100]	2600 x 100 x 17 mm	5 pcs.	Veneer Parquet SPC O.R.C.A. Flooring Flooring Laminate Flooring
Square cut skirting board	E	95481 [EX 9002DS19_70]	2600 x 70 x 17 mm	10 pcs.	Veneer Parquet SPC O.R.C.A. Flooring Flooring Laminate Flooring
Square cut skirting board	E	95491 [EX 9002DS19_58]	2600 x 58 x 17 mm	10 pcs.	Veneer Parquet SPC O.R.C.A. Flooring Flooring Laminate Flooring
Shaped skirting board		95981 [EX 9002DS17_100]	2600 x 100 x 17 mm	5 pcs.	Veneer Parquet SPC Pooring O.R.C.A. Flooring Flooring

Skirting boards

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Shaped skirting board	E	95991 [EX 9002DS17_70]	2600 x 70 x 17 mm	10 pcs.	Veneer SPC O.R.C.A. Laminate Rooring
Shaped skirting board	E.	95471 [EX 9002DS17_58]	2600 x 58 x 17 mm	10 pcs.	Veneer SPC O.R.C.A. Laminate Plooring Plooring
Rounded skirting board		96001 [EX 9002DS15_100]	2600 x 100 x 15 mm	5 pcs.	Veneer SPC O.R.C.A. Laminate Flooring Flooring
Rounded skirting board		96021 [EX 9002DS16_90]	2600 x 90 x 16 mm	5 pcs.	Veneer SPC O.R.C.A. Laminate Placeting Pla
Rounded skirting board	E.	96011 [EX 9002DS15_70]	2600 x 70 x 17 mm	10 pcs.	Veneer SPC O.R.C.A. Laminate Flooring Flooring
Accessories for K58C skirting board		98011 98001 98021	External corners Internal corners End caps	90° in packs of 2 90° in packs of 2 in packs of 4, 2 left and 2 right	Veneer Parquet SPC Flooring O.R.C.A Flooring Laminate Flooring
Mounting clips	HIER	91501 [EX 50510]	-	Box of 30 pieces, complete with screws and rawl plugs	Veneer SPC O.R.C.A. Laminate Flooring



Profile systems

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Design click transition profile, 2-part	1	95112 95113	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Plooring O.R.C.A. Flooring Laminate Flooring
Design click ramp profile, 2-part	au l	95122 95123	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Plooring O.R.C.A. Flooring Laminate Flooring
Design click end profile, 2-part	4	95132 95133	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC Plooring O.R.C.A. Flooring Laminate Flooring
Transition click profile		98391 98381	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC O.R.C.A. Flooring Coring Flooring
Ramp click profile		98411 98401	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC O.R.C.A. Flooring Cooring Flooring
End click profile		98371 98361	900 mm or 2700 mm	1 pcs.	Veneer Parquet SPC O.R.C.A. Flooring Flooring Flooring
3in1 profiles		95315 [EX 95315-A002] anodised stainless steel	1000 mm	10 pcs.	Veneer SPC O.R.C.A. Parquet Flooring Laminate Flooring

Additional accessories

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit	Suitable for
Tap-block		90274 [EX SCHLAGKLOTZ]	168/90 x 70 x 20 mm	20 pcs.	Veneer Parquet SPC O.R.C.A. Elocring Laminate Flooring Flooring Elocring Control Flooring Flooring Control
Clickguard™ joint sealant	W total	90431 [EX 94270]	-	125 ml ≘ca. 10 m²	Veneer Parquet SPC Flooring O.R.C.A Flooring Laminate Flooring
Laminate cleaner	No.	90411 [EX 92011]	-	1000 ml	Veneer Parquet SPC O.R.C.A. Laminate Flooring Flooring Control of the second
Design floor cleaner		97554 [EX DESIGNBODEN_ REINIGER]	-	750 ml	Veneer Parquet SPC Flooring O.R.C.A. Laminate Flooring
Cleaner for floors with O.R.C.A. (Moisture Defense Technology)		90411 [EX REINIGER_ORCA]	-	750 ml	Veneer Parquet SPC O.R.C.A. Laminate Flooring



Skirting boards

Decor matching overview


	Collection Name	Decor	Skirting board	Decor	Skirting board	Decor	Skirting board
Veneer Parquet		0272	9002-white	0274	9002-white	O352	9002-white
Ven	VENEER PARQUET	0273	9002-white	O350	9002-white	O462	9002-white
		R065	R065	R081	R081	R148	Z215
		R066	R066	R082	R082	R149	R124
		R070	R070	R109	R079	R150	Z212
SPC	ROCKO	R073	R073	R123	R073	R170	R124
S SI	HOURO	R076	R076	R124	R124	R171	R091
		R077	R077	R125	R077	R172	R066
		R078	R078	R128	R073	R173	R073
		R079	R079	R129	R079	R174	R066
		K500	L133	K504	8836	K508	L137
	Ø rganic	K501	4283	K505	8633	K509	L138
	FLEX @rganic TOUCH	K502	L134	K506	5542	K510	L139
		K503	L135	K507	L129		
		0771	9002-white	0942	9002-white		
		O980	9002-white	0943	9002-white		
O.R.C.A. Flooring		5947	8285	K385	8282	K406	8575
O.R. Floo	_	K035	4375	K387	L061	K479	L105
		K224	8634	K389	8475	K665	L118
	CLASSIC	K230	8836	K395	L071	K668	8206
		K231	L003	K405	R002	K669	L121
		5543	5543	K413	L064	K489	L131
		K063	9855	K452	4275	K598	5549
	OLLVEIT OILLITT	K327	8521	K488	L128		
	HERRINGBONE 8	5947	8285	K411	5539		
ing	TIETH HINGDONE O	K326	8836	K488	L128		
mo.re! Laminate Flooring	ALTITUDE	K326	8836	K658	L120	K662	L125
mo.re! inate Flo	ALITIODE	K657	8836	K659	8220	K664	L125
Lam	ATLANTIC 12	5542	5542	K287	8096	K450	8816
	ATLANTIC 12	K285	4274	K336	L003	K476	8573

5537 8573 K412 8573 K479 5947 8285 K413 L064 K665 ATLANTIC 10 8155 8155 K475 5570 K667	L118 9701
	9701
ATLANTIC 10 8155 8155 K475 5570 K667	
	9206
8156 8156 K476 8573 K668	0200
K411 5539 K478 5542 K669	L121
4375 4375 K389 8475 K471	L123
K411 5539 K478 5542 K669	8836
K326 8836 K451 8461 K634	8575
ATLANTIC 8 K327 8092 K453 9807 K640	9701
K385 8282 K461 L122 K649	5550
K387 L061 K463 8467 K650	Z149
K388 L062 K469 8220 K653	L143
5541 5541 8631 8631 K625	8837
5542 5542 K057 8220 K629	8836
5543 5543 K338 4274 K633	R002
5946 L004 K407 L070 K635	L123
SUPER NATURAL 5966 5543 K418 L057 K638 5985 8573 K419 8220 K641 8573 8573 K468 5549 K642	8836
5985 8573 K419 8220 K641	9855
8573 8573 K468 5549 K642	5542
8575 8575 K482 8374 K647	L123
8630 8630 K485 4283 K652	9807
CASTELLO K039 L004 K396 L003 K470	8837
K395 L071 K462 5549 K656	8575



Decor overview

Flooring Type	Collection Name	Decors
Veneer Parquet	Ørganic VENEER PARQUET	O273 O462 O274 O350 O272 O352
SPC Flooring	ROCKO	R079 R129 R078 R109 R148 R172 R174 R077 R065 R125
	∕ørganic FLEX	K500 K503 K506 K501 K507 K504 K502 K505 K508 K509
O.R.C.A. Flooring	∕grganic TOUCH	O771 O980 O942 O943
O.R.	∕/grganic CLASSIC	K668 K231 K669 K406 K405 K230 5947 K224 K665 K395
	∕ rganic CLEVER SILENT	5543 K063 K452 K413 K488 K598 K327 K489
	HERRINGBONE 8	K326 5947 K488 K411
in g	ALTITUDE	K659 K658 K657 K326 K662 K664
mo.re! Laminate Flooring	ATLANTIC 12	K336 5542 K285 K450 K476 K287
La	ATLANTIC 10	K475 K668 K669 K667 K478 K665 K476 5537 5947 K412
	ATLANTIC 8	K640 K451 K392 K463 K469 K453 K653 K326 K327 K471
Classic Laminate Flooring	SUPER NATURAL	8630 5543 K652 K418 5542 K485 8575 5966 5946 K407
Cla: Laminate	CASTELLO	K470 K656 K462 K396 K039 K395

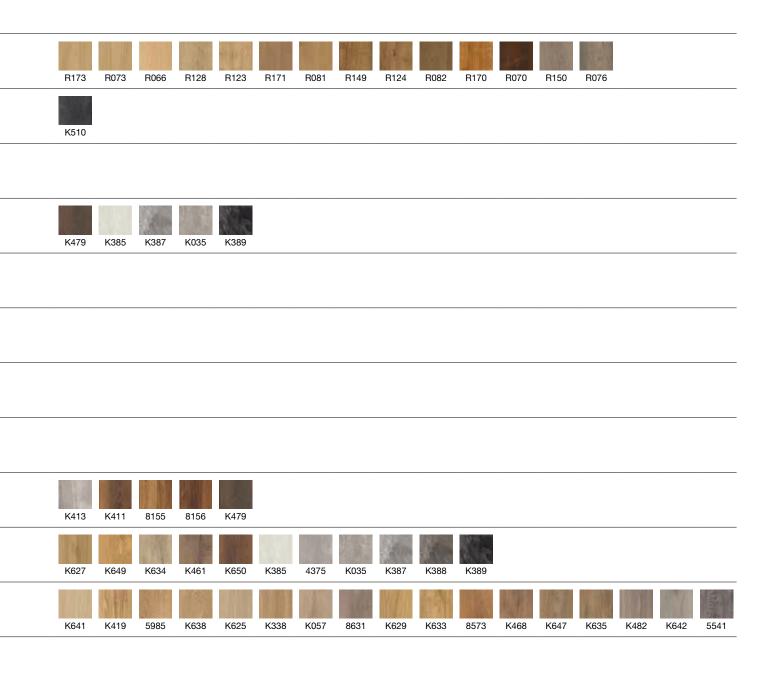



Packaging information

Flooring Type	Collection Name	Plank Size	Thickness	Planks/ Pack.	m² sq ft/Pack.
Veneer	Ørganic VENEER PARQUET	1383 x 244 mm 54.45" x 9.61"	8.5 mm	7	2.36 25.42
SPC Flooring	поско	1210 x 192 mm 47.64" x 7.56" 1210 x 192 mm 47.64" x 7.56" 1210 x 234 mm 47.64" x 9.21" 1210 x 295 mm 47.64" x 11.61"	5+1 mm 5 mm 5 mm 5 mm	7 8 7 7	1.63 17.54 1.86 20.01 1.98 21.30 2.50 26.90
	∕9rganic FLEX	638 x 322 mm 25.12" x 12.68" 1288 x 189 mm 50.71" x 7.44"	7 mm 7 mm	12 10	2.47 26.53 2.43 26.19
O.R.C.A. Flooring	∕ rganic TOUCH	1383 x 159 mm 54.45" x 6.26" 1383 x 244 mm 54.45" x 9.61"	8.5 mm 8.5 mm	11 7	2.42 26.05 2.36 25.42
0. E	Ørganic CLASSIC	638 x 330 mm 25.12" x 12.99" 1288 x 195 mm 50.71" x 7.68"	8 mm 8 mm	11 9	2.32 24.92 2.26 24.32
		1288 x 195 mm 50.71" x 7.68"	6+1 mm	9	2.26 24.32
	HERRINGBONE 8	630 x 126 mm 24.80" x 4.96"	8 mm	11	0.87 9.40
ring	ALTITUDE	2003 x 245 mm 78.86" x 9.65"	12 mm	4	1.96 21.12
mo.re! Laminate Flooring	ATLANTIC 12	1288 x 195 mm 50.71" x 7.68"	12 mm	6	1.51 16.21
Lar	ATLANTIC 10	1288 x 195 mm 50.71" x 7.68"	10 mm	7	1.76 18.92
	ATLANTIC 8	638 x 330 mm 25.12" x 12.99" 1288 x 195 mm 50.71" x 7.68"	8 mm	11 9	2.32 24.92 2.26 24.32
ssic	SUPER NATURAL	1288 x 195 mm 50.71" x 7.68"	8 mm	9	2.26 24.32
Classic Laminate Flooring	CASTELLO	1285 x 192 mm 50.59" x 7.56"	8 mm	9	2.22 23.89

Weight/Pack. [kg lbs]	Pack./Pallet = m² sq ft
16 36	45 = 106 1144
16 35 17 38 19 41 23 51	60 = 98 1250 52 = 97 1040 48 = 95 1024 45 = 112 1210
16 35 16 35	32 = 79 849 52 = 127 1362
16 35 16 36	45 = 108 1172 45 = 106 1144
17 38 17 36	32 = 74 797 52 = 118 1265
13 29	52 = 118 1265
6 13	96 = 84 902
20 44	36 = 71 760
15 34	52 = 78 843
15 33	52 = 91 984
15 34 15 34	32 = 74 797 52 = 118 1265
15 34	52 = 118 1265
15 34	52 = 115 1242





Made by Kronospan













* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions). Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling – on a scale from A+ (very low-emission) to C (high-emission).

www.eco-institut.de/e/portfolio/emissions-dans-lair-interieur



www.krono-original.com www.facebook.com/KronoOriginal



www.kronospan.com info@krono-original.com