




CLOUDY EFFECT
CARPET TILE

CLOUDY EFFECT CARPET TILE

BULUT EFFECT KARO HALI

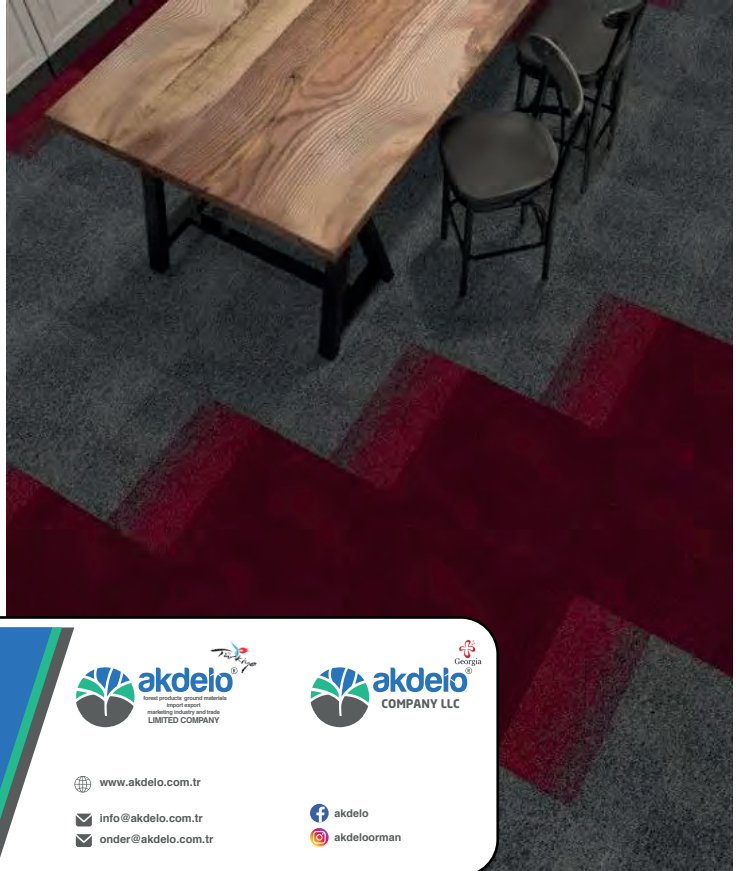

akdele

Forest Products Ground Materials Import Export Marketing Industry and Trade
LIMITED COMPANY

Mobile: +90 532 500 51 52 Mobile Company: +90 532 250 65 29

Phone: +90 212 111 11 11

Address: Atakent Mah. 243. Sk. No:6 Tema İstanbul Sitesi 7/B No:1 Halkalı / K.çekmece İstanbul / TÜRKİYE

Address: Khelvachauri, Akhalshehis Meurneoba Mah. 3-CU Sk. No: 26 Batumi / GEORGIA

Akdele Orman Ürünleri Zemin Malzemeleri İthalat İhracat Pazarlama San. ve Tic. LTD. ŞTİ.



www.akdele.com.tr

info@akdele.com.tr

onder@akdele.com.tr



akdele

akdeleorman

beranet
Designed by beranet


RENK SEÇENEKLERİ / COLOURS



4400



4400-4401

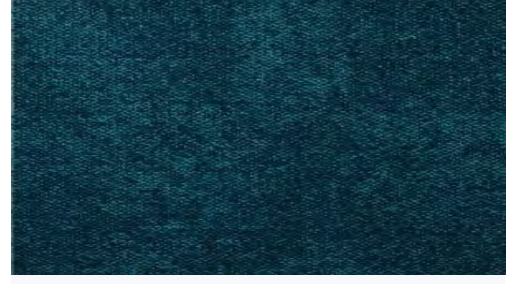

4401



4400




4400-4402



4402



4400

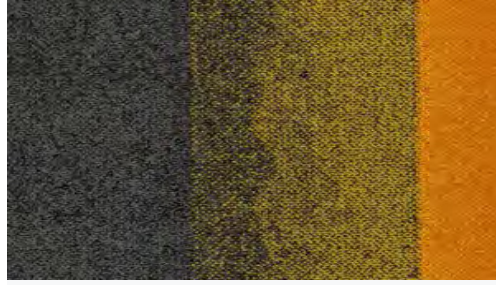


4400-4403




4403



4400

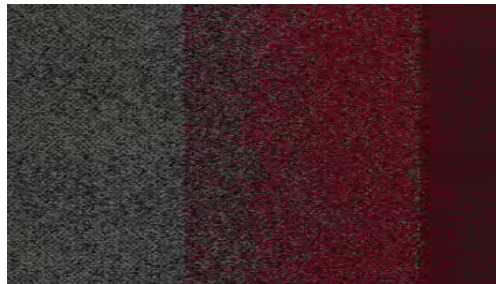

4400-4404

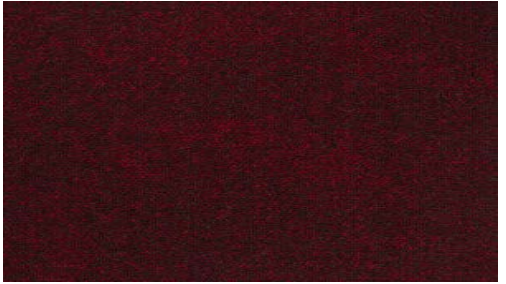

4404

RENK SEÇENEKLERİ / COLOURS



4500



4500-4501



4501



4500



4500-4502



4502



4400



4400-4500



4500

UYGULAMA ÖRNEKLERİ #1



4500



4500-4501



4501

UYGULAMA ÖRNEKLERİ #2




4500

UYGULAMA ÖRNEKLERİ #3



4500

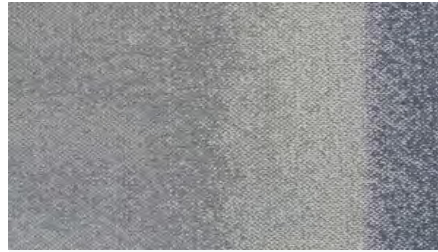

4500-4502





4502

TEKNİK BİLGİLER

Technical Specifications

Style Name	Bulut Effect
Construction	Multi-Level Loop
Fiber	100% Nylon
Gauge	1/12"
Stitches	11per inch
Pile Weight	645g/sqm
Average Pile	4 mm±0.5 mm
Height Backing	E+Bac with
Tile Size	Fiberglass
Anti-microbial	50cm*50cm
Installation Method	Ultra-Fresh (Available)

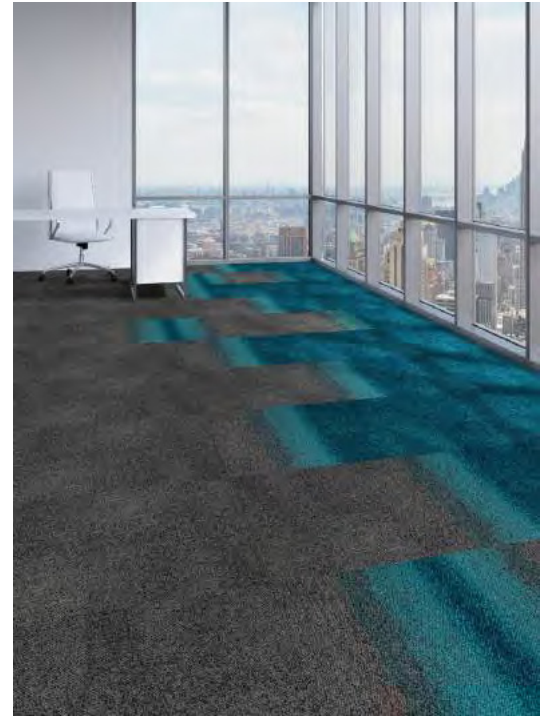

Performance Specifications

	Test Code	Standard	Test Results
Flammability Tests			
Radiant Panel	ASTM E 648	≥.45 watt/cm	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
Stability			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional	AACHEN	≤ 0.2%	≤ 0.2%
Stability Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
Propensity Colour Fastness			
Light	AATCC 16 E	≥ 4-5	4-5
Rubbing/	AATCC 165	≥ 4-5	4-5
Crocking Wear Tests			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 3-4	3
Generic Tests			
Green	CRI Green Label GLP		Accredited
Carpet(VOC)	6331 [#] /6332 [#] BS EN ISO 354	Absorption Coefficient-NRC	aw =0.15(H)
Acoustic-Nylon			



Declare.



**LIVING
BUILDING
CHALLENGE**



3R Reduce
Reuse
Recycle
= Infinity Green !

